

**TITLE:**

Cat6 4pr UTP


CODE:

SFX/C6-UTP-PVC-GRY-1

DESCRIPTION:1m (per metre) Category 6, 4pr UTP Grey
PVC HDBaseT Certified**SUPPLIED AS:**

Per 1m Lengths

- Capable of 1000mbps transfer speed or 250mhz frequency at a maximum distance of 90 meters
- Unscreened cables are thinner, more flexible and less expensive so are suited to building LANS and telecoms applications
- Polyvinyl chloride plastic has excellent aging properties and will usually exceed a 25-30 year service life
- Improved performance and protection against fire
- Improved performance and protection against fire

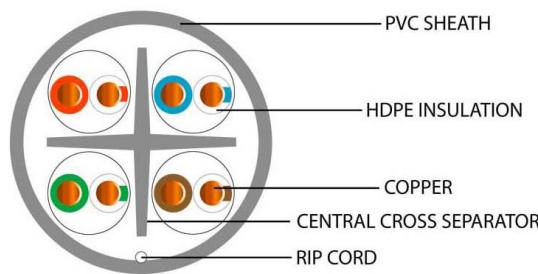



NETWORK CABLE

Securi-Flex®

Network cable

Product Specification

25-YEAR WARRANTY



UK
CA

Cable Construction

CPR	Eca
Conductor	Bare Copper
Conductor Diameter (mm)	0.53 ±0.01
Overall Diameter (mm)	6.10 ±0.03

Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18

Outer/Jacket Specification

Jacket	PVC
Overall Colour	Grey
Overall Diameter (mm)	6.10 ±0.03
Jacket Colour	Grey RAL 7004
Jacket Thickness (mm)	0.55 ±0.03
Nylon Rip-Cord	White 210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<950/km
Rated Temperature (°C)	-20°C to 80°C



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX® Drum-Roll® LUCKINS®

epim

ELECTRICAL
DISTRIBUTORS'
ASSOCIATION

BSI
ISO 9001
2015
Certified

KNX
MEMBER

ca!

DPR
Certified


UK
CA



MORE INFORMATION:

CLASSIFICATION CRITERIA		CPR GUIDE		
EURO CLASS (ca:cable)	FIRE RATING	SFX COMMENT	SUBCLASSIFICATIONS FOR EUROCLASSES Bca to Dca	
Reaction to Fire BS EN ISO 1716				
A_{ca}	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.	(S) SMOKE PRODUCTION	(D) FLAMING DROPLETS
Reaction to Fire BS EN 50399		BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
B1_{ca}	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1ca.	s1a: s1 + transmittance $\geq 80\%$ (BS EN 61034-2)	d0: No fall of droplets or flaming particles, times for 1200 seconds
B2_{ca}	Combustible, low flame spread & heat release contribution to the fire	Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	s1b: s1 + transmittance $\geq 60\% < 80\%$ (BS EN 61034-2)	d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds
C_{ca}	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving.	s1: Low production of slow propagation of smoke	s2: Intermediate production & propagation of smoke
D_{ca}	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s3: None of the above	d3: None of the above
Reaction to Fire BS EN 60332-1-2				
E_{ca}	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	Visit us online: www.securiflex.co.uk	
F_{ca}	Combustible, fire spread of more than 425mm	Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. For a cable to meet Aca, B1ca, B2ca or Cca, there also needs to be regular on-going factory audits.	

OUR OPERATING TEMPERATURE RANGE GUIDE

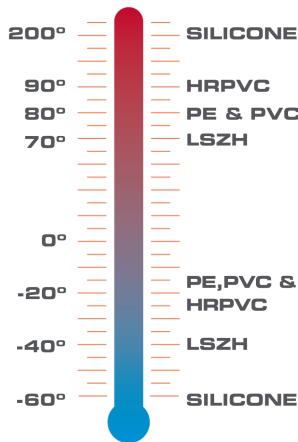

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23