



# VHLR


## Very Handy Little Relay

### GENERAL

Thank you for purchasing the VHLR relay from CDV. This device provides dual change over contacts rated at 5Amps for general purpose use. The input trigger voltage will operate from 12 to 30 Volts DC or AC. When using trigger voltages over 18 Volts and 24 Volts there are links to cut on the PCB as indicated in the drawing below.

### DESCRIPTION

The VHLR will provide two independent changeover contacts for general purpose use. When a trigger voltage is applied at the input terminals both contacts will change state. Please measure your input trigger voltage prior to connecting this to the VHLR. If the voltage equals or exceeds 18 Volts then please cut the appropriate link. If the input voltage equals or exceeds 24 Volts then please cut both links. Failure to cut the link or links with input voltages exceeding 18 Volts will cause the premature failure of the relay.

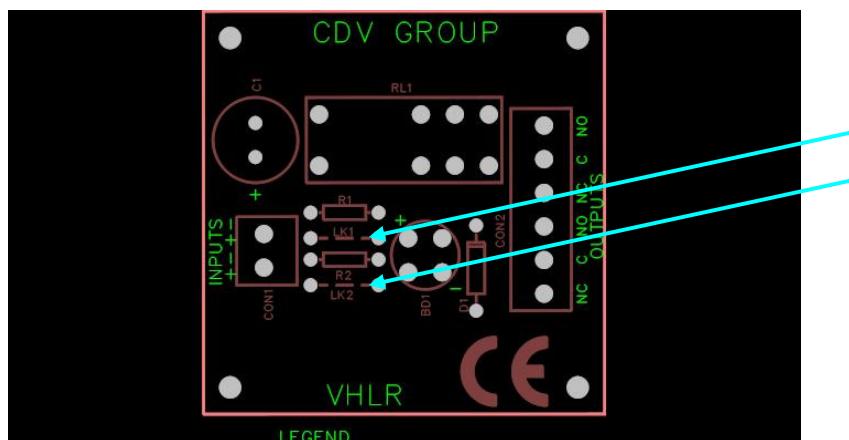

### TECHNICAL SPECIFICATION

Description	Value	Unit	Notes
Input Voltage	12-30	Volts	AC or DC
Switching Current	5	Amps	Inductive or non-inductive at 30Volts DC or AC
IP Rating	44		Internal use only
Warranty	24	Months	Return to manufacturer warranty
Compliance			CE, ROHS & WEEE

