

# RG-EW1200G PRO

## AC1300 Dual-band Gigabit Wireless Router



### Highlights

- 802.11ac wave2
- Six omnidirectional antennas providing strong Wi-Fi signals
- Full coverage, easy setup, and seamless roaming
- Parental control and health mode
- 96 concurrent connections
- Easy network management at your fingertips with Reyee Router App

# Highlight Features

## RG-EW1200G PRO

### Enjoy Family Moment with a Superior Internet

It's our mission to provide you high-quality online moment.

 4 Gigabit Ethernet ports

 Dual-core hyper-threading CPU

 802.11ac Wave2

 1267 Mbps



### Strong WiFi Signal Throughout Your Home


 FEM design

 6dBi omnidirectional antennas



### Full Coverage, Easy Setup, Seamless Roaming

Amazed by [Reyee Mesh](#)

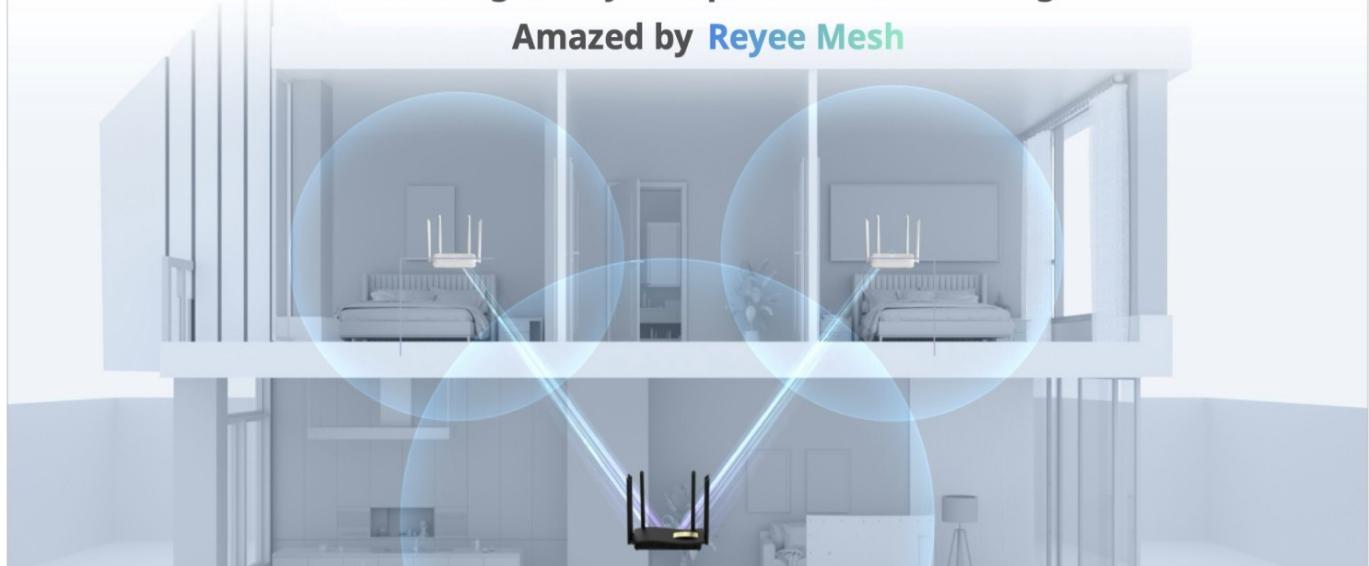

# Highlight Features


## Good Helper for Your Family Management

Parental Control    Health Mode

Ruijie Cloud App allows you to manage the internet access authority of the specified terminal, including the time limit, URL blocking and black/white list setup.


Parental Control    **Health Mode**

The health mode limits the radiation exposure and blacks out the indicator lights for you to have a good sleep.

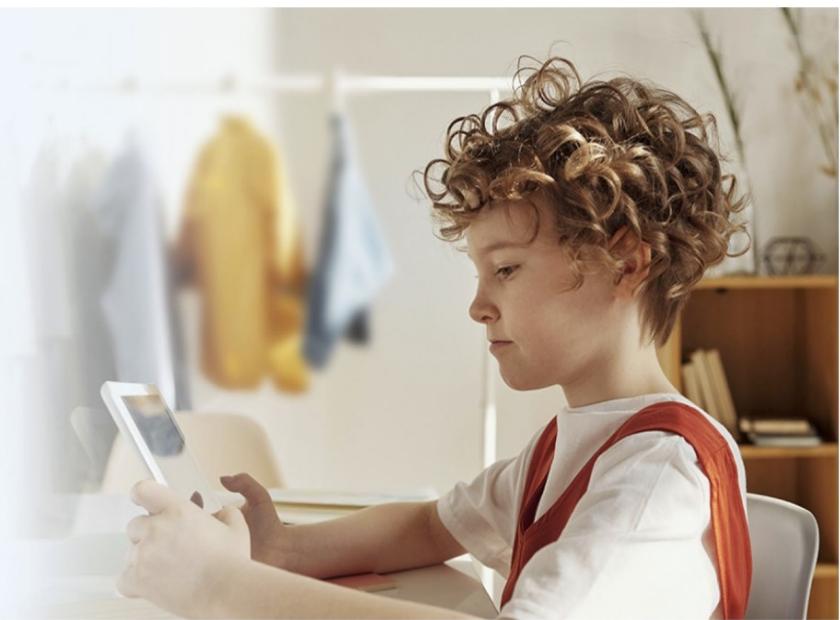

## Concurrently Support Multiple Devices Connection

Dual-Band integration together with the MU-MIMO technology offer low interference and fast speed internet to up to 96 terminals simultaneously.

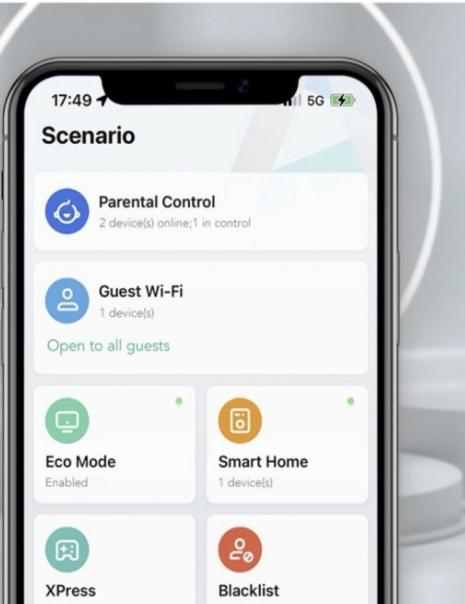

## Take Control of Your Home Network at Fingertips

Set up your home network in **Reyee Router App** in two minutes. More **Life-time Free** functions are waiting for you to Explore, Experience, Expect.

    
Remote Reboot    Xpress Mode    Share Network



# Hardware Specifications

Model	RG-EW1200G PRO
<b>Wi-Fi Radio</b>	
Operating band	IEEE 802.11b/g/n, 2.400GHz~2.4835GHz; IEEE 802.11a/n/ac, 5.150GHz~5.350GHz; IEEE 802.11a/n/ac, 5.470GHz~5.725GHz; IEEE 802.11a/n/ac, 5.725GHz~5.850GHz
FCC	EPA
Max. Wi-Fi Speed	2.4 GHz, 400 Mbps 5 GHz, 867 Mbps
Maximum transmit power	2.4 GHz: 802.11b: 23 dBm 802.11g: 6 Mbps 23 dBm; 54 Mbps 21 dBm 802.11n: MCS0 23 dBm; MCS7 20 dBm  5 GHz: 802.11n: MCS0 23 dBm; MCS7 20 dBm 802.11a: 6 Mbps 23 dBm; 54 Mbps 21 dBm 802.11ac: MCS0 23 dBm; MCS7 20 dBm; MCS9 19 dBm
	Note: The transmit power varies according to regulations in different countries and regions.
MIMO	2.4 GHz, 2 x 2 5 GHz, 2 x 2
Wi-Fi standard	Wi-Fi 5 (IEEE 802.11ac)
<b>Antenna</b>	
Antenna	6 x external antennas
Antenna gain (2.4 GHz)	4.5 dBi
Antenna gain (5 GHz)	6 dBi
<b>Certification and Regulatory Compliance</b>	
Certification	CE, CB
<b>Dimensions and Weight</b>	
Product dimensions (W x D x H)	220 mm × 140 mm × 36 mm (8.66 in. × 5.51 in. × 1.42 in.) (excluding antennas)
Weight	0.39 kg (0.86 lbs) (without packaging materials) 0.98 kg (2.16 lbs) (with packaging materials)
<b>Environment and Reliability</b>	

# Hardware Specifications

Model	RG-EW1200G PRO
Operating humidity	5% RH to 95% RH (non-condensing)
Operating temperature	0 °C to +45 °C (32 °F to 113 °F)
Storage humidity	5% RH to 95% RH (non-condensing)
Storage temperature	-40 °C to +70 °C (-40 °F to 158 °F)
<b>Port Specifications</b>	
LEDs	1 x system status LED 4 x Ethernet port LEDs
LAN ports	3 x 10/100/1000BASE-T ports
WAN ports	1 x 10/100/1000BASE-T port
<b>Power Supply and Consumption</b>	
Power supply	DC 12 V 1.5 A
<b>Product Information</b>	
Warranty	3 years
<b>System Specifications</b>	
RAM	128MB

# Software Specifications

Model	RG-EW1200G PRO
<b>Basic Configurations</b>	
<b>LED management</b>	Yes
<b>Internet access mode</b>	PPPoE, DHCP, Static IP, WISP, L2TP
<b>Preconfiguration</b>	Yes
<b>Reset and keep configurations</b>	Yes
<b>Restoring factory defaults</b>	Yes
<b>Configuration backup</b>	Yes
<b>Local upgrade</b>	Yes
<b>Online upgrade</b>	Yes
<b>Scheduled upgrade</b>	No
<b>AP mode</b>	Yes
<b>Ethernet Switching</b>	
<b>WAN port aggregation</b>	No
<b>LAN port aggregation</b>	No
<b>Specifying the VLAN tag</b>	Yes
<b>IP Service</b>	
<b>Port mapping</b>	Yes
<b>ARP binding</b>	Yes
<b>Number of ARP binding entries</b>	64
<b>DDNS</b>	Yes
<b>No-IP DNS</b>	Yes
<b>Ruijie DDNS</b>	Yes
<b>NAT-DMZ</b>	Yes
<b>Number of port mapping entries</b>	50

# Software Specifications

Model	RG-EW1200G PRO
UPnP	Yes
<b>Behavior Management</b>	
Parental control	Yes
Client access control (based on MAC addresses)	Yes
Client access control (based on time)	Yes
Maximum number of controlled clients	32
Maximum number of parental control policies	No
Selecting clients from the client list to block their access to the Internet	Yes
Specifying MAC addresses of controlled clients	Yes
<b>Ethernet Interface</b>	
MAC address cloning	Yes
VLAN-based IPTV	Yes
<b>Flow Control</b>	
Flow control based on number of users	Yes
Standalone/Shared mode	Yes
Interface flow control	Yes
<b>IPTV/VLAN</b>	
Multiple IPTV ports	Yes
<b>Multicast</b>	
IGMP proxy	Yes
IGMP snooping	No
<b>Network Management and Monitoring</b>	

# Software Specifications

Model	RG-EW1200G PRO
<b>Line detection</b>	Yes
<b>Arabic</b>	Yes
<b>Chinese (Hong Kong Traditional)</b>	Yes
<b>Chinese (Simplified)</b>	Yes
<b>English</b>	Yes
<b>Indonesian</b>	Yes
<b>Italian</b>	Yes
<b>Russian</b>	Yes
<b>Spanish (Latin America)</b>	Yes
<b>Thai</b>	Yes
<b>Turkish</b>	Yes
<b>Vietnamese</b>	Yes
<b>Ruijie Cloud management</b>	Yes
<b>Scheduled device restart</b>	Yes
<b>eWeb login password length</b>	8 to 63 characters
<b>Wired repeater mode</b>	Yes
<b>Wireless repeater mode</b>	Yes
<b>WISP mode</b>	Yes
<b>Rate Limiting</b>	
<b>Client-based rate limiting</b>	Yes
<b>Reyee Mesh 3.0</b>	
<b>Reyee Mesh 3.0</b>	Yes
<b>Automatic switching between wired and wireless repeater mode</b>	Yes

# Software Specifications

Model	RG-EW1200G PRO
Recommended hop count	2
Maximum number of clients	192
Maximum number of devices	32
<b>Security</b>	
Encryption mode	Yes
<b>System Performance Capacity</b>	
Maximum number of concurrent clients	32 (2.4 GHz) 64 (5 GHz)
Recommended number of concurrent clients	8 (2.4 GHz) 24 (5 GHz)
IPTV/IGMP client capacity	5
IPTV/IGMP multicast capacity	5
IPTV/IGMP wired forwarding performance	20 Mbps
Recommended camera limit	6 (2.4 GHz) 16 (5 GHz)
<b>VPN</b>	
Number of concurrent tunnels supported by the OpenVPN server	8
Certificate authentication	Yes
OpenVPN bandwidth	13 Mbps
OpenVPN client	Yes
OpenVPN server	Yes
Server domain name configuration	Yes
Username and password authentication	Yes
Number of concurrent tunnels supported by the PPTP VPN server	No
PPTP VPN client	Yes

## Software Specifications

Model	RG-EW1200G PRO
PPTP VPN server	No
<b>Wireless Configuration</b>	
Guest Wi-Fi	Yes
<b>WLAN</b>	
1024-QAM	No
MLO	No
DFS	Yes
802.11k/v roaming	Yes
Wi-Fi blocklist capacity	30
SSID hiding	Yes

## Package Contents

Model	RG-EW1200G PRO
<b>Accessories</b>	
Ethernet cable	1
Power adapter	1
<b>Device</b>	
Device	1
<b>Manual</b>	
User Manual	1
Warranty Card	1

**Ruijie** | Reyee

 **Redefine your easy network**



**Ruijie Networks Co., Ltd.**  
Official Website: <https://Reyee.Ruijie.com>