

# RG-RAP2260(E)

## Reyee Wi-Fi 6 AX3200 Multi-G Ceiling Access Point



### Highlights

- Build ultra-high performance network with 3202Mbps wireless throughput
- Client connections over 500, provide higher practical performance for users as well
- Boost Internet speed with 2.5Gbps uplink
- Easily install extra AP with Reyee Mesh technology
- Set up Wi-Fi 6 network in 3 minutes with Ruijie Cloud

## Highlight Features

**Easily Build Your Ultra-High Performance Network  
in High-Density Environment**

[Interface](#) [Installation](#)



3202 Mbps

 AX3200  
Wi-Fi 6

 2.5Gbps  
Wired Uplink

 4x4  
MU-MIMO

 Reye Mesh  
Technology

 Free Cloud  
Management

**Easily Build Your Ultra-High Performance Network  
in High-Density Environment**

[Interface](#) [Installation](#)



3202 Mbps

 AX3200  
Wi-Fi 6

 2.5Gbps  
Wired Uplink

 4x4  
MU-MIMO

 Reye Mesh  
Technology

 Free Cloud  
Management

## Highlight Features


### Provide Higher Practical Performance for Users

Reyee RG-RAP2260(E) AP's 2.4GHz and 5GHz radio outperformed the Ubiquiti U6-LR dramatically in both the transmit and receive tests. \*



\* Source: Tolly Test Report #221153 November 2021

4x4:4 MIMO Wi-Fi 6 Access Point Wireless Performance - Single Client - 2.4GHz Radio  
(as reported by Keysight IxChariot)

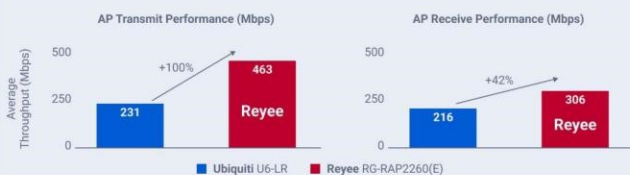


Note: Average of two runs. AP and client in shielded chamber. 20 streams. All tests run on auto channel with 40MHz bandwidth. One desktop with the ASUS PCE-AC88 802.11ac Network Adapter was used as the client.

Source: Tolly, October 2021

Figure 1

4x4:4 MIMO Wi-Fi 6 Access Point Wireless Performance - Single Client - 5GHz Radio  
(as reported by Keysight IxChariot)

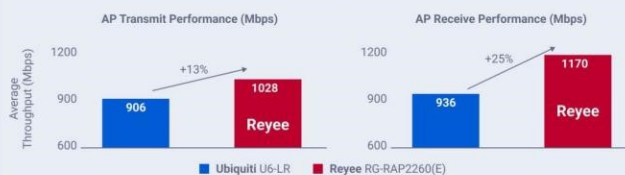


Note: Average of two runs. AP and client in shielded chamber. 20 streams. All tests run on auto channel with 80MHz bandwidth. One desktop with the ASUS PCE-AC88 802.11ac Network Adapter was used as the client.

Source: Tolly, October 2021

Figure 2

### Better Multi-User Experience in High-Density Scenarios

Performance upgraded, support client connections over 500.

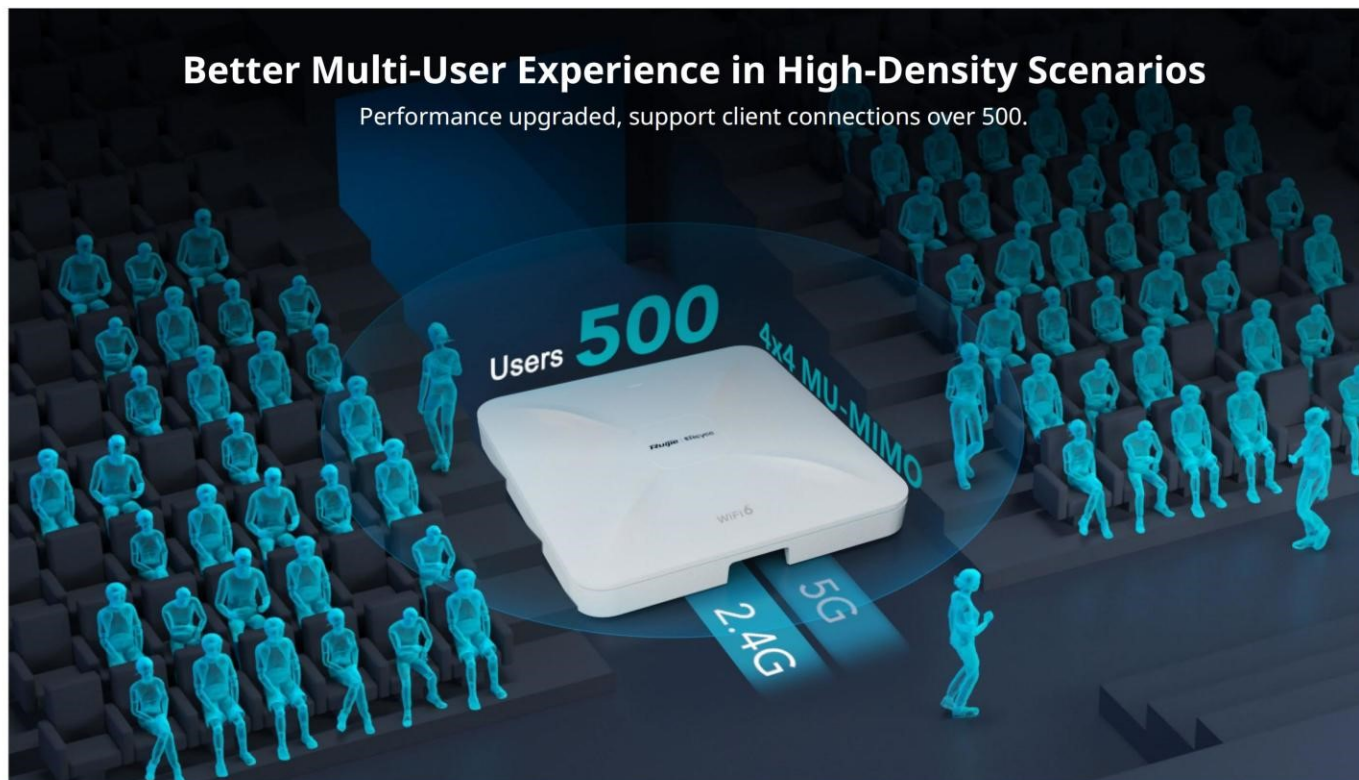



## Highlight Features

### Boost Your Internet Speed with 2.5Gbps Uplink

Build network for future, protect your investments.



### Easily Install Extra AP with Reyee Mesh

Less wiring, more relaxing.



## Highlight Features


### Easily Set Up Your Wi-Fi 6 Network in 3 Minutes

With SON (Self-organizing Network) technology, easily set up a whole Wi-Fi network by Ruijie Cloud APP.



### Cloud, Make Your Business Easy

- Self-organizing network
- Centralized network management
- Scenario based configuration
- Cloud portal authentication
- Remote monitoring and maintenance

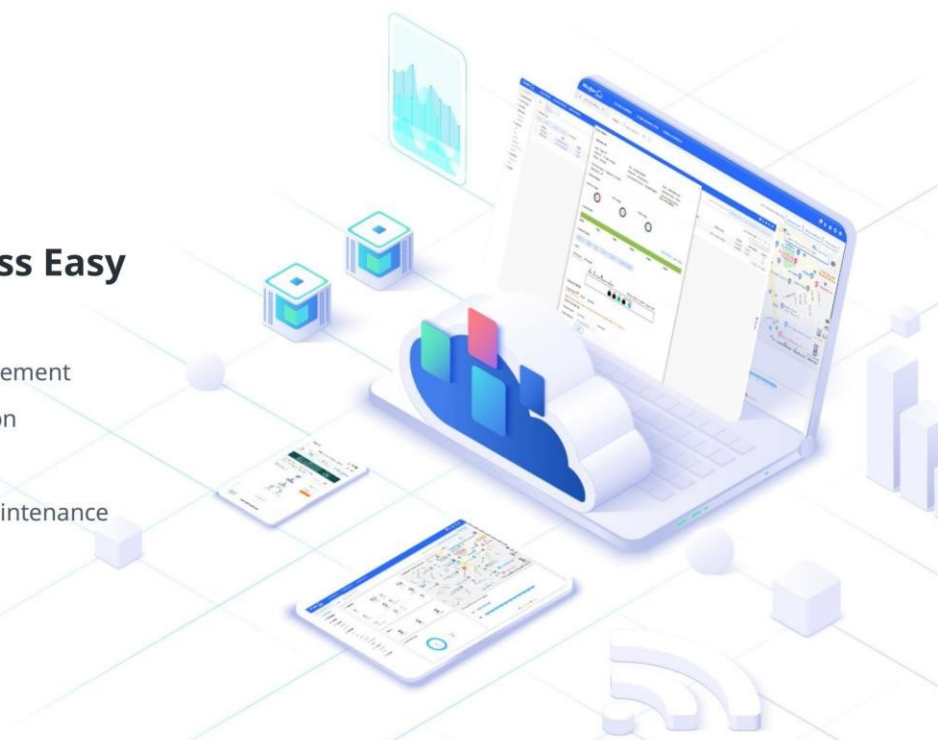

## / Product Information

Model	RG-RAP2260(E)
Product Type	Ceiling AP

## / Hardware Specifications

Model	RG-RAP2260(E)
Wi-Fi Radio	
6 GHz Wi-Fi	No
5 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11a/n) Wi-Fi 5 (IEEE 802.11ac) Wi-Fi 6 (IEEE 802.11ax)
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n) Wi-Fi 6 (IEEE 802.11ax)
Operating band	IEEE 802.11b/g/n/ax, 2.400 GHz to 2.4835 GHz IEEE 802.11a/n/ac/ax, 5.150 GHz to 5.350 GHz, 5.470 GHz to 5.725 GHz, 5.725 GHz to 5.850 GHz  Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands.
Radio design	Dual-radio 8 spatial streams • 2.4 GHz: 4 x 4, MIMO • 5 GHz: 4 x 4, MU-MIMO
FEM	2.4 GHz: 4 x eFEM 5 GHz: 4 x eFEM
6 GHz channel width	No
5 GHz channel width	Auto/20/40/80 MHz
2.4 GHz channel width	Auto/20/40 MHz
Maximum wireless data rate	3201 Mbps
6 GHz wireless data rate	No
5 GHz wireless data rate	2401 Mbps
2.4 GHz wireless data rate	800 Mbps

## / Hardware Specifications

Model	RG-RAP2260(E)
Maximum transmit power	<p>Frequency bands and maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country specific restrictions apply.</p> <p>European Union &amp; United Kingdom:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>Myanmar:</p> <p>2400–2483.5 MHz, EIRP ≤ 23 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Thailand:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5470–5725 MHz, EIRP ≤ 30 dBm</p> <p>5725–5825 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia:</p> <p>2400–2483.5 MHz, EIRP ≤ 27 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>5725–5825 MHz, EIRP ≤ 23 dBm</p> <p>Egypt:</p> <p>2400–2483.5 MHz, EIRP ≤ 20 dBm</p> <p>5150–5350 MHz, EIRP ≤ 23 dBm</p>
Maximum transmit power (6 GHz)	No
Maximum transmit power (5 GHz)	<p>Combined power: 29 dBm (single-stream power: 23 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Maximum transmit power (2.4 GHz)	<p>Combined power: 29 dBm (single-stream power: 23 dBm)</p> <p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Coverage range	<p>190 m<sup>2</sup> (2045.14 square ft.)</p> <p>Note: The data is obtained in an ideal environment without obstruction. The signal coverage radius depends on client performance and environmental interference.</p>
Modulation	<p>OFDM: BPSK @ 6/9 Mbps, QPSK @ 12/18 Mbps, 16-QAM @ 24 Mbps, 64-QAM @ 48/54 Mbps</p> <p>DSSS: DBPSK @ 1 Mbps, DQPSK @ 2 Mbps, and CCK @ 5.5/11 Mbps</p> <p>MIMO-OFDM: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM and 1024-QAM</p> <p>OFDMA</p>
Receive sensitivity	<p>11b: -91 dBm (1 Mbps), -88 dBm (5.5 Mbps), -85 dBm (11 Mbps)</p> <p>11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps)</p>

## Hardware Specifications

Model	RG-RAP2260(E)
	Mbps), -71 dBm (54 Mbps) 11n: -83 dBm (MCS0), -65 dBm (MCS7), -83 dBm (MCS8), -65 dBm (MCS15) 11ac: 20 MHz: -83 dBm (MCS0), -57 dBm (MCS9) 11ac: 40 MHz: -79 dBm (MCS0), -57 dBm (MCS9) 11ac: 80 MHz: -76 dBm (MCS0), -51 dBm (MCS9) 11ax: 20 MHz: -85 dBm (MCS0), -58 dBm (MCS11) 11ax: 40 MHz: -82 dBm (MCS0), -54 dBm (MCS11) 11ax: 80 MHz: -79 dBm (MCS0), -52 dBm (MCS11)
Antenna	
Antenna	2.4 GHz: 4 built-in omnidirectional antennas 5 GHz: 4 built-in omnidirectional antennas
Antenna horizontal orientation	No
Antenna vertical orientation	No
Antenna gain (6 GHz)	No
Antenna gain (5 GHz)	3.00 dBi
Antenna gain (2.4 GHz)	3.00 dBi
Dimensions and Weight	
Product dimensions (W x D x H)	220 mm x 220 mm x 35 mm (8.66 in. x 8.66 in. x 1.38 in.) (excluding the mounting bracket)
Color	White
Weight	≤ 0.55 kg (1.21 lbs.) (without packaging materials)
Shipping weight	≤ 1.43 kg (3.15 lbs.)
Port Specifications	
Number of 10/100/1000BASE-T ports	1
Number of 10/100/1000/2500BASE-T ports	1
Reset button	1
LEDs	1 x system status LED
Power Supply and Consumption	
Power supply	<ul style="list-style-type: none"><li>• DC power adapter</li><li>• PoE+</li></ul>



## / Hardware Specifications

Model	RG-RAP2260(E)
	Note: If both the DC power adapter and PoE/PoE+ are available for power supply, the DC power adapter is preferred.
Local power supply	Yes, one DC power connector (12 V, 2.5 A)
Dimensions of the DC connector	Outer diameter: 5.5 mm (0.22 in.) Inner diameter: 2.1 mm (0.08 in.) Depth: 10 mm (0.39 in.)
PoE In standard	IEEE 802.3at (PoE+)
PoE budget	No
Maximum power consumption	25.4 W
Environment and Reliability	
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage temperature	−40°C to +70°C (−40°F to +158°F)
Operating humidity	5% RH to 95% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Mounting options	Ceiling/Wall
IP rating	IP41
Surge protection	Ethernet port: ±2 kV for common mode
MTBF	400,000 hours
Certification and Regulatory Compliance	
RoHS	Yes
Safety compliance	EN 62368-1
EMC	EN 55032 EN 55035 EN 61000-3-3 EN 61000-3-2 EN 301489-1 EN 301489-3 EN 301489-17
RF	EN 300 328 EN 301 893 EN 300 440

# / Hardware Specifications

Model	RG-RAP2260(E)
Certification	CE, FCC, CB, ISED, cTUVus
System Specifications	
Flash memory	16 MB
RAM	256 MB DDR3

## Software Specifications

Model	RG-RAP2260(E)
Basic Configurations	
AP mode	Yes
Routing mode	Yes
Internet access mode	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
Interface	
IPTV transparent transmission	Yes
Ethernet Interface	
PPPoE clients	Yes
Ethernet Switching	
IEEE 802.1Q VLAN	Yes
WLAN	
Maximum number of associated wireless clients	64 (2.4 GHz) 256 (5 GHz) 256 (2.4 GHz and 5 GHz enabled)
Recommended number of associated wireless clients	● Support for IEEE 802.11ax: 16 (2.4 GHz) 104 (5 GHz) 120 (2.4 GHz and 5 GHz enabled) ● Support for IEEE 802.11ac: 16 (2.4 GHz) 64 (5 GHz) 80 (2.4 GHz and 5 GHz enabled)
Maximum number of SSIDs	8
Radio-based client limiting	Yes
Layer 2 isolation	Yes
OFDMA	Yes
WMM	Yes

## Software Specifications

Model	RG-RAP2260(E)
DFS	Yes
MLO	No
4K-QAM	No
Different SSIDs for the same VLAN	Yes
Enabling/Disabling MLO	No
AP load balancing	No
Beamforming	Yes
802.11k/v roaming	Yes
Fast transition (802.11r)	Yes
Layer 2 roaming	Yes
Layer 3 roaming	Yes
AI roaming	Yes
PSK authentication	Yes
Static allowlist	Yes
Adjusting the transmit power for beacon and probe frames	Yes
Encryption mode (WPA-PSK, WPA2-PSK, WPA/WPA2-PSK)	Yes
OWE (Enhanced Open) WPA3-SAE WPA2-PSK/WPA3-SAE	Yes
Number of blocklists and allowlists based on MAC addresses (single SSID)	256
Number of global blocklists/allowlists	256
Mesh management	Yes
AP Mesh	Yes



## Software Specifications

Model	RG-RAP2260(E)
AP portal authentication	Yes
Maximum number of devices that can be managed	300
One-Click Network Optimization	Yes
Static blocklist	Yes
IP Service	
ARP binding	Yes
IPv4 ping	Yes
IPv6 ping	Yes
Traceroute	Yes
Static/Dynamic NAT	Yes
DHCP server	Yes
Authentication	
802.1X authentication	Yes
Network Management and Monitoring	
Wireless repeater mode	Yes
Web login information	Single-device login address: 10.44.77.254 Network-wide login address: 10.44.77.253 Default password: admin
Network-wide configuration and management	Yes
Ruijie Reyee App management	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
SNMP	Yes
Configuration synchronization among the app, eWeb, and Ruijie Cloud	Yes

## Software Specifications

Model	RG-RAP2260(E)
Displaying device information on Ruijie Cloud	Yes

## Package Contents

Model	RG-RAP2260(E)
Package Contents	
Package Contents	1 x AP 1 x Mounting bracket 2 x Cross pan head screws (ST4.2 x 20 mm) 2 x Plastic expansion anchors ( $\phi$ 9 x 25.4 mm) 1 x User Manual 1 x Warranty Card
Accessories	
Power adapter	No

**Ruijie** | ReYee

 **R**edefine **y**our **e**asy network



**Ruijie Networks Co., Ltd.**

Official Website: <https://Reyee.Ruijie.com>