


INTRUDER ANCILLARIES

MAGNETIC CONTACTS - GRADE 2 AND 3

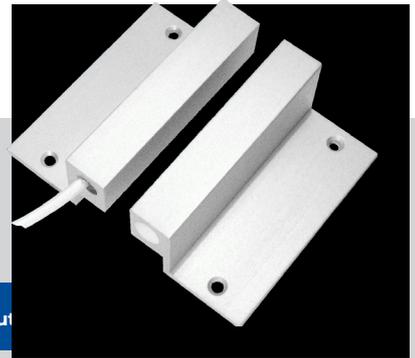

For use with wired alarm systems, to protect windows, doors and roller shutters. Elmdene have a vast range of Grade 1, 2 and 3 magnetic contacts, in Metal or Plastic, Flush or Surface mount, to suit the application.

Find out

FEATURES

- Ideal for single or multiple doors
- Cabled or Terminal
- Environmental class II and III
- 5 year warranty

COMPLIANT TO:

- PD6662:2017
- EN50131-1:2006
- EN50131-2-6:2008

GRADE 2 AND 3 METAL AND PLASTIC CONTACTS FLUSH MOUNTED OR SURFACE MOUNTED CONTACTS.

	Part Number	Grade	Env/ Class	Type	Potted/ Terminal	Metal/ Plastic	Operating Gap (mm)	Resistors	Dimensions (mm)
	QFT-GN QFT-RD	2	II	Flush	Terminal	P	10	1k/1k 4k7/2k2	20mm dia
	RFT-RD	2	II	Flush	Terminal	P	10	4k7/2k2	20mm dia
	QST-GN QST-RD	2	II	Surface	Terminal	P	20	1k/1k 4k7/2k2	70 L x 17 W x 15 D
	6HD-GN	2	III	Surface	Potted	M	25	1k/1k	80 L x 19 W x 12.5 D
	VHDA-GN	2	II	Surface	Terminal	M/P	42	1k/1k	170L x 25W x 25D
	6RSA-100-GN 6RSA-100-RD	2	III	Roller Shutter	Potted	M	55	1k/1k 4k7/2k2	150L x 40W x 14D
	EN3-QFC-GN EN3-QFC-RD	3		Flush	Potted	P	13	1k/1k 4k7/2k2	20mm dia 27mm depth
	EN3-QSC-GN			Surface	Potted	P	11	1k/1k	70 L x 17 W x 15 D
	EN3-LSC-GN EN3-LSC-RD			Surface	Potted	P	7	1k/1k 4k7/2k2	93 L x 25 W x 25 D
	EN3-RSA-GN EN3-RSA-RD			Roller Shutter	Potted	M	18	1k/1k 4k7/2k2	150 L x 40 W x 14 D

All part numbers within this range are to be purchased in packs of 10.