

**TITLE:**

Speaker BC

**CODE:**

SFX/SPK-PRO-4C-LSZH-PNK-1


**DESCRIPTION:**

1m (per metre) Speaker Cable 4 Core BC  
30x0.25mm 16AWG Pink LSZH

**SUPPLIED AS:**

Per 1m Lengths

- For high end domestic sound installations
- Oxygen free copper strands and low resistance values give optimum sound performance at all times
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases
- A professional grade speaker cable

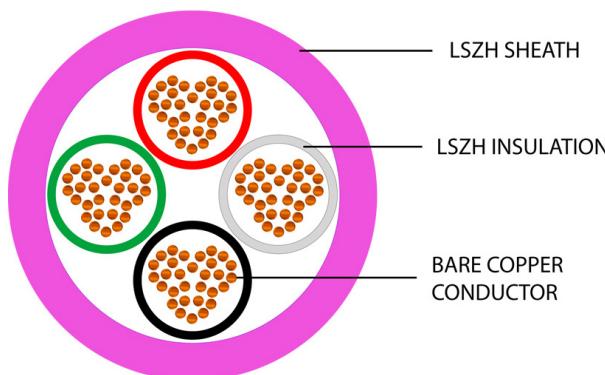

# Product Specification



## Cable Construction

Cable Construction	4 Cores
CPR	Eca
Conductor	Oxygen Free Copper
Conductor Diameter (mm)	0.25 ±0.008 x 30(1.31mm <sup>2</sup> )
Overall Diameter (mm)	7.50 ±0.20

## Insulation

Insulation	LSZH
Insulation Colour	Red,Black,White,Green
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.31

## Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Pink
Overall Diameter (mm)	7.50 ±0.20
Jacket Colour	Pink RAL 3015
Jacket Thickness (mm)	0.60 ±0.01

## Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<12.6O/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	300-500V




**enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23**

## MORE INFORMATION:

EURO CLASS (ca:cable)	CLASSIFICATION CRITERIA		CPR GUIDE	Securi-Flex®
	FIRE RATING	SFX COMMENT		
Reaction to Fire BS EN ISO 1716				
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.	(S) SMOKE PRODUCTION	(D) FLAMING DROPLETS
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1ca.	(A) SMOKE ACIDITY	BS EN 60754-2
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	BS EN 50399/BS EN 61034-2	BS EN 50399
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving.	s1a: s1 + transmittance >=80% (BS EN 61034-2)	a1: Very low acidity (conductivity <2.5 $\mu$ S/mm & pH >4.3)
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)	a2: low acidity (conductivity <10 $\mu$ S/mm & pH >4.3)
Reaction to Fire BS EN 60332-1-2				
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	s2: Intermediate production & propagation of smoke	d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	s3: None of the above	d2: None of the above
<a href="http://www.securiflex.co.uk">Visit us online:</a> <b>www.securiflex.co.uk</b>				<b>SFX®</b> The Trusted Cable Brand
Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. For a cable to meet Aca, B1ca, B2ca or Cca, there also needs to be regular on-going factory audits.				

### OUR OPERATING TEMPERATURE RANGE GUIDE

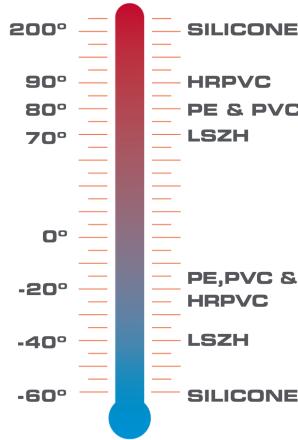

Securi-Flex®


[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23