


RG-AirMetro460G

CPE of RG-AirMetro Series Wireless Bridges

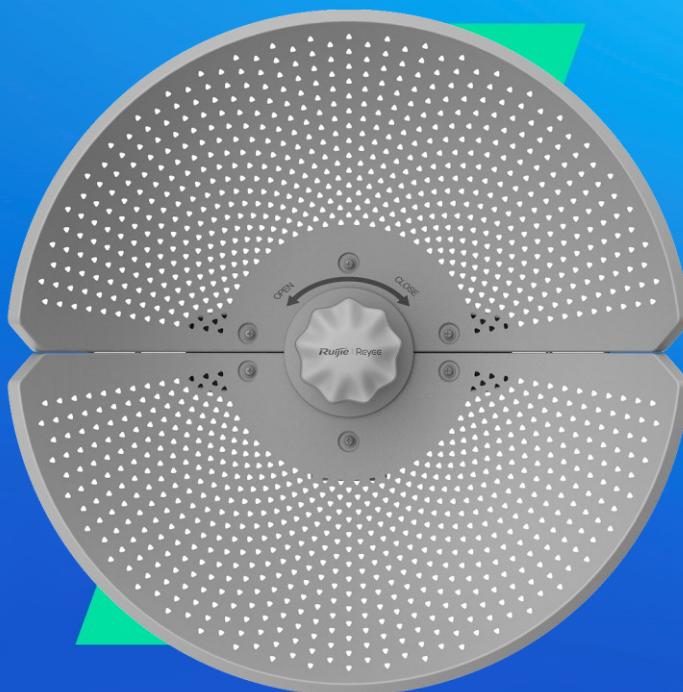

Highlights

- PTP Max. 15 km Working Distance
- PTMP Easy Pairing All in 30 sec
- 24 V Passive PoE
- IP65, 6 kV Surge Protection and ± 24 kV ESD against Harsh Environment
- 220.32 km/h (137 mph) Wind Survivability
- All-in-one Cloud Management Simplifies the User Journey

/ Highlight Features



RG-AirMetro Series Wireless Bridges

After pairing, the bridges support:

15 km

Up to 15 km
Wireless Transmission

32 PTMP


Up to 32 PTMP
Links



Easy Site Survey
Tool



All-in-One Cloud
Management

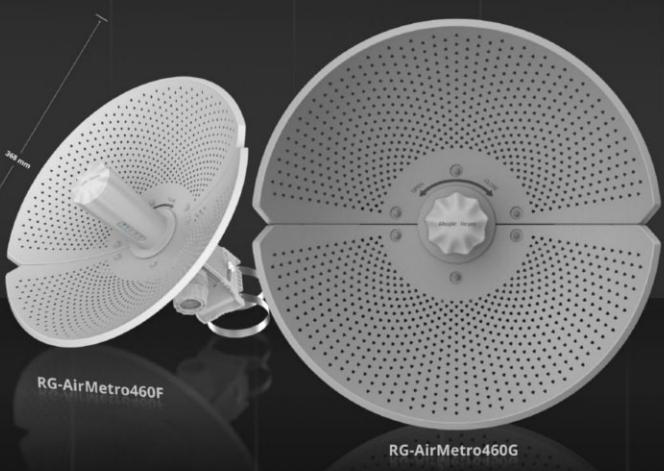

/ Highlight Features

CPE


Mix freely for Various Scenarios

RG-AirMetro460G

1 x 10/100/1000 Mbps Port

15 km, 23 dBi

5 GHz, 867 Mbps

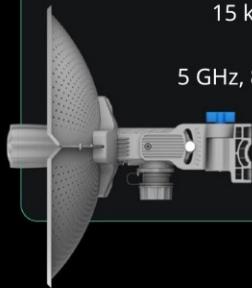


RG-AirMetro460F

1 x 10/100 Mbps Port

15 km, 23 dBi

5 GHz, 867 Mbps

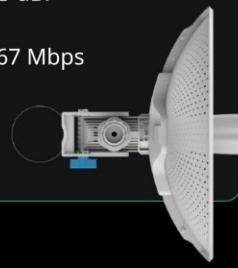

Signal Enhancement



The Secret of Circular Grace

Compared with Square Antenna:


The **total gain** of the circular is **increased**;

The gain in both horizontal and vertical directions is more **balanced**;

Therefore, under the same coverage area, the signal of the circular antenna is stronger.

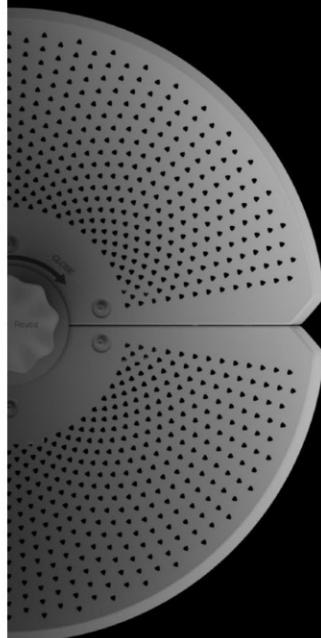


Horizontal: 23.28 dBi



Vertical: 23.19 dBi

Note: All data here are theoretical values obtained by Ruijie Reyee internal laboratories through tests carried out under particular conditions. Actual data may vary owing to differences in individual products, software versions, application conditions, and environmental factors. All data is subject to actual usage.

/ Highlight Features

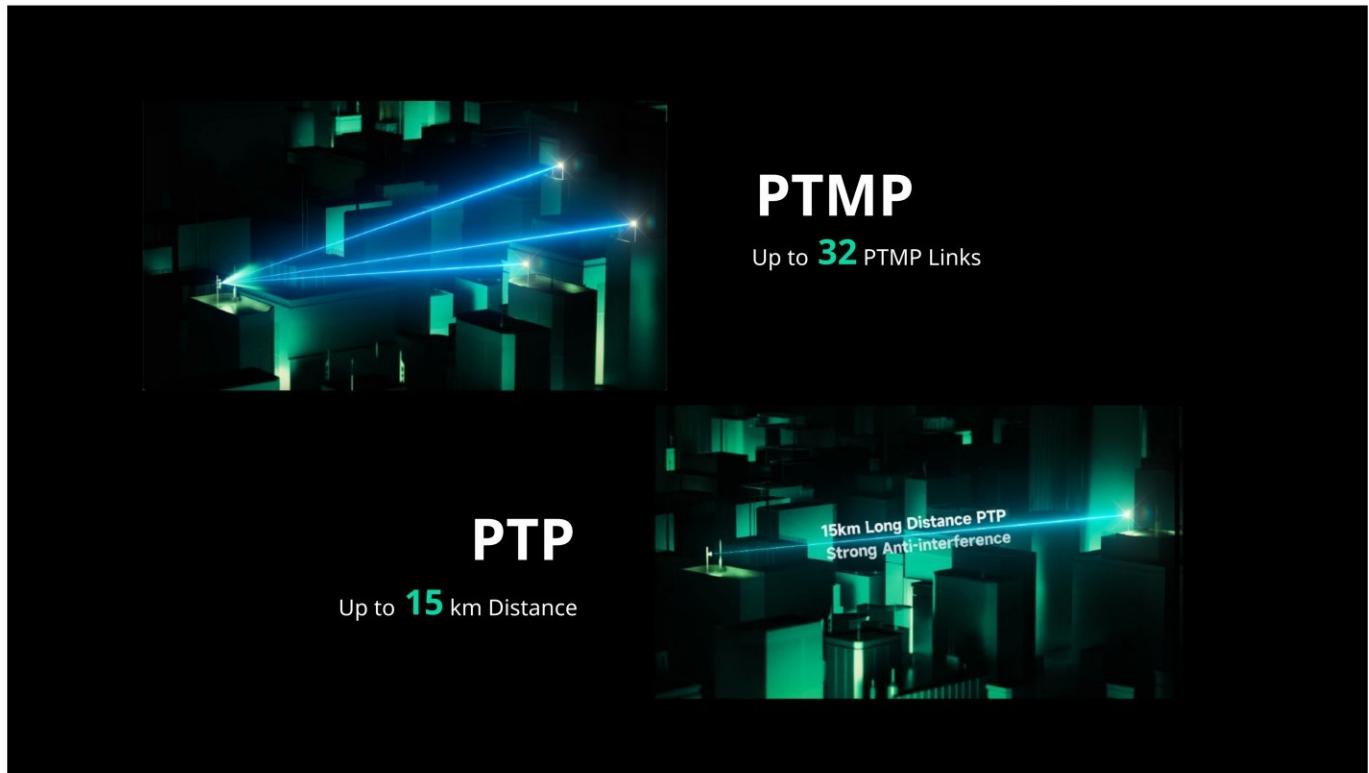

/ Highlight Features


WISP

Extensive Transmission Without Fiber Connections



CCTV


Affordable Excellence and Smooth Surveillance

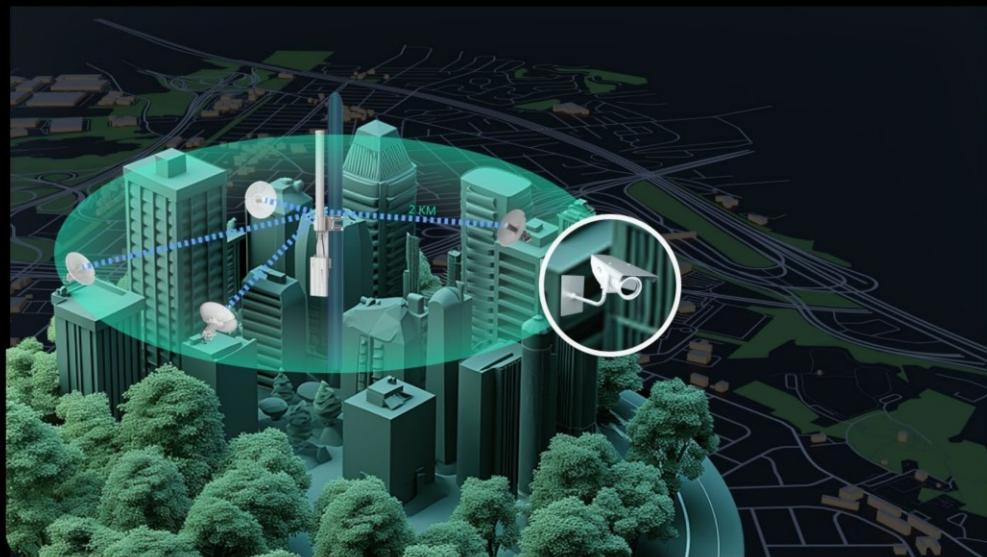

Highlight Features

AI Heatmap for Bridge


Your Real Outdoor Adventure Companion

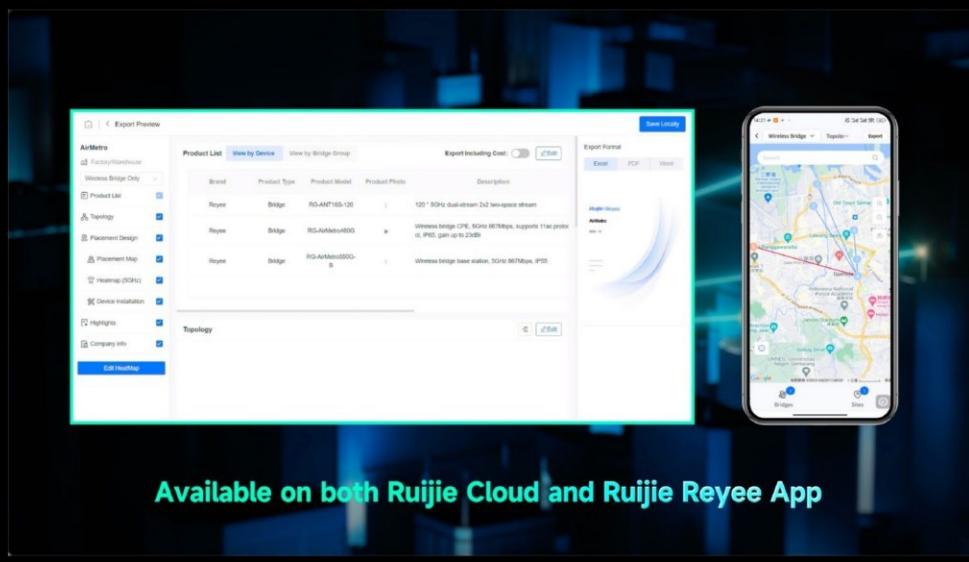

Available on both Ruijie Cloud and Ruijie Reyee App

Alignment Tool

Your Big-Voice, Time-Saver Guide

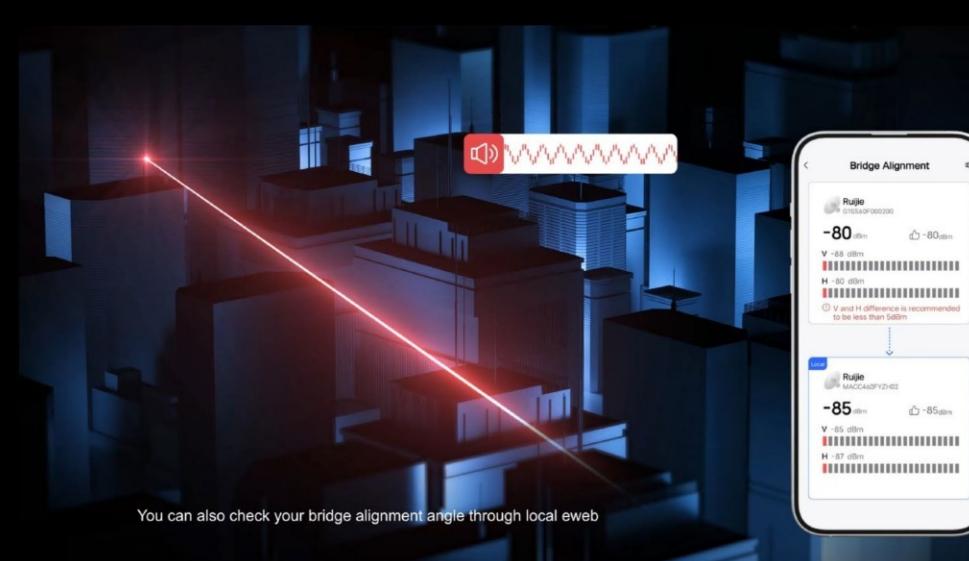

You can also check your bridge alignment angle through local eweb

/ Highlight Features

Spectrum Scan and Link Optimization

Thumbs-Up Guide



Cloud: Make Your Business Easy

- Quick Setup
- All-in-one Cloud
- Monitoring based on Real, Complete Topology
- Identifying Issues by Auto-Alarm



Product Information

Model	RG-AirMetro460G
Product Type	Bridge
Accessory	No

Hardware Specifications

Model	RG-AirMetro460G
Applicable Scenarios	
Applicable Scenarios	CCTV/WISP
Wi-Fi Radio	
Radio design	<p>Dual-radio 3 spatial streams</p> <ul style="list-style-type: none">Radio 1: 2.4 GHz, 1 spatial stream: 1 x 1, SISORadio 2: 5 GHz, 2 spatial streams: 2 x 2, MIMO
Operating band	<p>IEEE 802.11b/g/n: 2.400 GHz to 2.483 GHz IEEE 802.11a/n/ac: 5.150 GHz to 5.350 GHz IEEE 802.11a/n/ac: 5.470 GHz to 5.725 GHz IEEE 802.11a/n/ac: 5.725 GHz to 5.850 GHz</p> <p>Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands. For details, see Channels for Countries & Regions (official website link to be added).</p>
Wi-Fi standard	Wi-Fi 5 (IEEE 802.11ac) standard, compatible with IEEE 802.11a/b/g/n standards
2.4 GHz Wi-Fi	Wi-Fi 4 (IEEE 802.11b/g/n)
5 GHz Wi-Fi	Wi-Fi 5 (IEEE 802.11ac)
2.4 GHz channel width	Auto/20/40 MHz
5 GHz channel width	Auto/20/40/80 MHz
Transmission rate	<p>Maximum wireless data rate: 1166 Mbps</p> <ul style="list-style-type: none">Radio 1: 2.4 GHz, 300 MbpsRadio 2: 5 GHz, 866 Mbps
Maximum transmit power	2.4 GHz: 20 dBm (single-stream power: 20 dBm) 5 GHz: 29 dBm (single-stream power: 26 dBm)

Hardware Specifications

Model	RG-AirMetro460G
	<p>Note: The transmit power varies according to regulations in different countries and regions.</p>
Receive sensitivity	802.11b: -91 dBm (1 Mbps), -88 dBm (5 Mbps), -85 dBm (11 Mbps) 802.11a/g: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 802.11n: -83 dBm@MCS0, -65 dBm@MCS7, -83 dBm@MCS8, -65 dBm@MCS15 802.11ac HT20: -83 dBm (MCS0), -57 dBm (MCS9) 802.11ac HT40: -79 dBm (MCS0), -54 dBm (MCS9) 802.11ac HT80: -76 dBm (MCS0), -51 dBm (MCS9)
Modulation	802.11b: BPSK, QPSK, CCK 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Highest QAM order	256
Antenna	
Antenna	2.4 GHz: 1 x 1 Built-in omnidirectional antenna 5 GHz: 2 x 2 External directional antenna with built-in feed source, horizontal: 9°, vertical: 9°
Antenna gain (2.4 GHz)	3 dBi
Antenna gain (5 GHz)	23 dBi
Antenna horizontal orientation	9°
Antenna vertical orientation	9°
System Specifications	
CPU	Dual-core processor, 880 MHz clock frequency per core
Flash memory	16 MB
RAM	128 MB DDR3
Dimensions and Weight	
Weight	0.20 kg (0.44 lbs) (without packaging materials)
Shipping weight	2.56 kg (5.65 lbs)
Product dimensions (W x D x H)	368.5 mm x 368.5 mm x 271 mm (14.51 in. x 14.51 in. x 10.67 in.) (Dimensions of the device after installation, including the mounting bracket.)

Hardware Specifications

Model	RG-AirMetro460G
Package dimensions (W x D x H)	404 mm x 256 mm x 147 mm (15.91 in. x 10.08 in. x 5.79 in.)
Color	Gray
Port Specifications	
Number of fixed LAN ports	1
Number of 10/100/1000BASE-T ports	1
Reset button	1
LEDs	1 x system status LED 1 x Ethernet port LED 3 x signal status LEDs
Power Supply and Consumption	
Power supply	Passive PoE adapter
Power input	Passive PoE adapter: <ul style="list-style-type: none">Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 HzRated input current: 0.5 A MaxRated output voltage: 24 V DCMaximum output current: 0.6 A
Number of PoE In ports	1
Maximum power consumption	12 W
Environment and Reliability	
Mounting options	Pole
Operating temperature	-40°C to +70°C (-40°F to +158°F)
Storage temperature	-40°C to +85°C (-40°F to +185°F)
Operating humidity	5% RH to 95% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	Operating altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.) Storage altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
MTBF	400,000 hours (about 45 years)

Hardware Specifications

Model	RG-AirMetro460G
Cooling	Natural cooling
IP rating	IP65
ESD protection	Standard test: contact discharge=24 kV, air discharge=24 kV, Class B
Surge protection	Service port: ± 6 kV for common mode Power connector: ± 4 kV for common mode and ± 2 kV differential mode
Certification and Regulatory Compliance	
Safety compliance	EN62368-1
EMC	EN 55032 EN 55035 EN 61000-3-3 EN 61000-3-2 EN 301489-1 EN 301489-3 EN 301489-17
Certification	CE, FCC, CB, ISED, cTUVus

Software Specifications

Model	RG-AirMetro460G
WLAN	
BaseStation/CPE mode switching	Yes
Enhanced one-to-many transmission (TDMA)	Yes
Bridge SSID hiding	Yes
WPA2-PSK encryption	Yes
WPA-PSK encryption	No
WPA/WPA2-PSK encryption	No
Recommended channel	Yes
Bridge speed test	Yes
Random security key upon configuration delivery	No
Configuring a security key for network-wide bridges	Yes
Configuring a security key for a single bridge group	Yes
Configuring a security key for a single bridge	Yes
Bridge SSID, channel, and power configuration	Yes
WMM	Yes
Maximum PTMP connections	1
Maximum bridge distance	15 km (9.32 miles)
One-touch pairing	Yes
Maximum effective distance of one-touch pairing	20 m (65.62 ft.)
Bridge performance	230 Mbps/1 km (0.62 miles) (HT40) 200 Mbps/3 km (1.86 miles) (HT40) 150 Mbps/5 km (3.11 miles) (HT40) 80 Mbps/10 km (6.21 miles) (HT40)
RSSI	- 58 dBm/1 km (0.62 miles) - 66 dBm/3 km (1.86 miles)

Software Specifications

Model	RG-AirMetro460G
	<ul style="list-style-type: none"> - 70 dBm/5 km (3.11 miles) - 78 dBm/10 km (6.21 miles)
Recommended number of connected cameras (3 Mbps)	<ul style="list-style-type: none"> 50/1 km (0.62 miles) 45/3 km (1.86 miles) 20/5 km (3.11 miles) 16/10 km (6.21 miles)
Recommended number of connected cameras (4 – 5 Mbps)	<ul style="list-style-type: none"> 30/1 km (0.62 miles) 25/3 km (1.86 miles) 12/5 km (3.11 miles) 8/10 km (6.21 miles)
Recommended number of connected cameras (6 – 7 Mbps)	<ul style="list-style-type: none"> 20/1 km (0.62 miles) 13/3 km (1.86 miles) 8/5 km (3.11 miles) 5/10 km (6.21 miles)
Recommended number of connected cameras (7-8 Mbps code streams)	<ul style="list-style-type: none"> 15/1 km (0.62 miles) 12/3 km (1.86 miles) 6/5 km (3.11 miles) 4/10 km (6.21 miles)
Real-time signal strength	Yes
Optimal signal strength	Yes
Active/Standby channel	Yes
Restoring to the active channel	Yes
Maximum number of devices on the SON	200
Basic Configurations	
eWeb login with the username and password	Yes
Local upgrade	Yes
Configuration backup	Yes
System language	Chinese (Simplified), English
System time settings	Yes
Ethernet Switching	
Interface rate	10/100/1000 Mbps auto-negotiation

Software Specifications

Model	RG-AirMetro460G
VLAN	Yes
Link aggregation	No
IP Service	
IPv4 ping	Yes
IPv4 traceroute	Yes
DHCP server	Yes
DHCP client	Yes
Security	
Broadcast storm control	Yes
Network Management and Monitoring	
SON	Yes
AI heatmap	Yes
Camera detection	No
Network-wide management SSID configuration	Yes
Network connection through the management SSID	No
Ruijie Cloud management	Yes
Restarting devices through Ruijie Reyee App	Yes
SNMPv1, v2c, and v3	Yes
Fault diagnosis	Yes Note: support for network tools (ping, traceroute, and nslookup), fault alarms, and fault collection
Restart cause prompt	Yes
Disconnection cause prompt	Yes
Cloud alarms on DFS signal detection	Yes

Package Contents

Model	RG-AirMetro460G
Device	
Device	1
Accessories	
Power adapter	1 Note: 24 V passive PoE adapter
Power cord	39.37 in. x 1
Mounting bracket	1
Screw	10 x Phillips pan head screws 2 x hex head machine screws M5 x 65 mm 1 x M5 nut
Manual	
User Manual	1
Warranty Card	1

Ruijie | Reyee

 **Redefine your easy network**



Ruijie Networks Co., Ltd.
Official Website: <https://Reyee.Ruijie.com>