



**TITLE:**

ISP Individual Foil Screen PE

**CODE:**

SFX/ISP2-PE-BLK-1


**DESCRIPTION:**

1m (per metre) ISP2 2pr 22AWG  
Individual Foil Screen 600V Black PE  
(8723)

**SUPPLIED AS:**

Per 1m Lengths

- Widely used in the security industry for CCTV telemetry purposes
- Also used in applications such as computing where extra screening is required to prevent cross talk between pairs
- Polyethylene plastic is excellent for use externally above ground or below ground inside ducting
- UV resistant

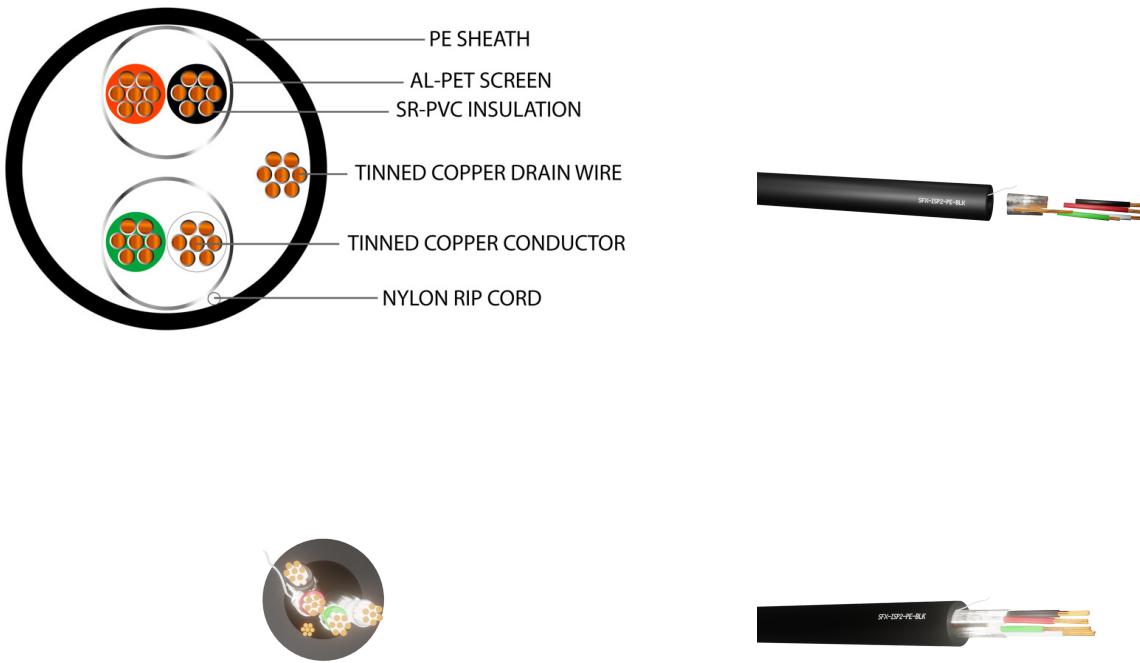



# Product Specification



## Cable Construction

Cable Construction	2 Pairs
CPR	Fca
Conductor	Tinned Copper
Conductor Diameter (mm)	0.24 ±0.008 x 7(0.33mm <sup>2</sup> )
Stranded Diameter (mm)	0.64
Overall Diameter (mm)	4.10 ±0.20

## Insulation

Insulation	SR-PVC
Insulation Colour	Red,Black;Green,White
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.24

## Outer/Jacket Specification

Jacket	PE
Overall Colour	Black
Overall Diameter (mm)	4.10 ±0.20
Jacket Colour	Black RAL 9005
Jacket Thickness (mm)	0.45
Nylon Rip-Cord	White 210D

## Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<500/km
Rated Temperature (°C)	-20°C to 80°C
Rated Voltage (V)	600V



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

## **MORE INFORMATION:**

CLASSIFICATION CRITERIA		CPR GUIDE		
EURO CLASS (ca:cable)	FIRE RATING	SFX COMMENT	SUBCLASSIFICATIONS FOR EUROCLASSES Bca to Dca	
Reaction to Fire BS EN ISO 1716				
<b>A<sub>ca</sub></b>	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.	(S) SMOKE PRODUCTION	(D) FLAMING DROPLETS
Reaction to Fire BS EN 50399		BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
<b>B1<sub>ca</sub></b>	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1ca.	s1a: s1 + transmittance $\geq 80\%$ (BS EN 61034-2)	d0: No fall of droplets or flaming particles, times for 1200 seconds
<b>B2<sub>ca</sub></b>	Combustible, low flame spread & heat release contribution to the fire	Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	s1b: s1 + transmittance $\geq 60\% < 80\%$ (BS EN 61034-2)	d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds
<b>C<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving.	s1: Low production of slow propagation of smoke	s2: Intermediate production & propagation of smoke
<b>D<sub>ca</sub></b>	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s3: None of the above	d3: None of the above
Reaction to Fire BS EN 60332-1-2				
<b>E<sub>ca</sub></b>	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	Visit us online: <a href="http://www.securiflex.co.uk">www.securiflex.co.uk</a>	
<b>F<sub>ca</sub></b>	Combustible, fire spread of more than 425mm	Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. For a cable to meet Aca, B1ca, B2ca or Cca, there also needs to be regular on-going factory audits.	

## OUR OPERATING TEMPERATURE RANGE GUIDE

