

# RG-EG210G-P-V3

## Reyee Cloud Managed PoE Router



### Highlights

- Unified features with upgraded flash storage.
- User-friendly configuration and easy to use.
- High reliability and load balancing through WAN ports.
- Easy to block unwanted applications with automatically updating library.
- Customized portal page, what you see is what you get.
- Secure access to internal devices remotely.

## Highlight Features




### Secure Access Internal Device Remotely

No matter dynamic or even private IP on gateway WAN port, Securely monitoring the NVR/IPC/Internal Server anytime from anywhere .



### Cloud, Make Your Business Easy

- Self-organizing network
- Centralized network management
- Scenario based configuration
- Cloud portal authentication
- Remote monitoring and maintenance

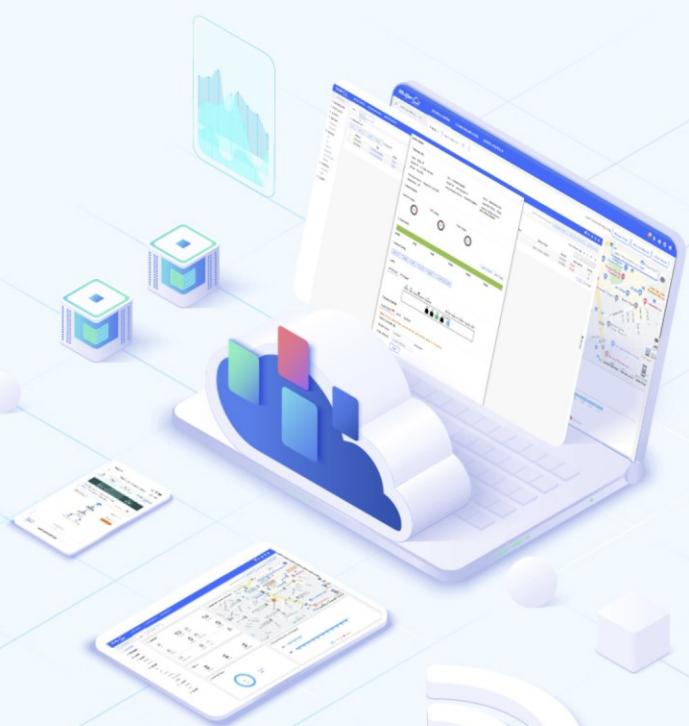

# Hardware Specifications

Model	RG-EG210G-P-V3
<b>Port Specifications</b>	
<b>Total number of RJ45 ports</b>	10
<b>Number of 10/100/1000BASE-T ports</b>	10
<b>Maximum number of LAN ports</b>	9
<b>Maximum number of WAN ports</b>	4
<b>Number of fixed LAN ports</b>	6
<b>Number of fixed WAN ports</b>	1
<b>Number of LAN/WAN ports</b>	3
<b>LEDs</b>	1 x system status LED 10 x Ethernet port LEDs
<b>Reset button</b>	1
<b>System Specifications</b>	
<b>CPU</b>	Dual-core processor, 880 MHz clock frequency per core
<b>Flash memory</b>	32 MB
<b>RAM</b>	256 MB
<b>Power Supply and Consumption</b>	
<b>Power supply</b>	DC power adapter
<b>Dimensions of the DC connector</b>	Outer Diameter: 5.5 mm Inner Diameter: 2.1 mm Depth: 10 mm
<b>Maximum power consumption</b>	130 W
<b>PoE budget</b>	110 W
<b>Number of PoE Out ports</b>	8
<b>PoE budget per port</b>	30 W
<b>PoE power pins</b>	1-2 (+), 3-6 (-)
<b>PoE Out standard</b>	IEEE 802.3af/at (PoE/PoE+)

# Hardware Specifications

Model	RG-EG210G-P-V3
<b>Dimensions and Weight</b>	
Package dimensions (W x D x H)	594mm x 426mm x 267mm (23.38 in. x 16.77 in. x 10.51in.)
Product dimensions (W x D x H)	202 mm x 108 mm x 28 mm (7.95 in. x 4.25 in. x 1.1 in.)
Shipping weight	1.60 kg (3.53 lbs)
Weight	1.48 kg (3.26 lbs)
<b>Environment and Reliability</b>	
Cooling	Natural cooling
Fan	Fanless design
Mounting options	Desk
Operating humidity	10% RH to 90% RH (non-condensing)
Operating temperature	0°C to 40°C (32°F to 104°F)
Storage humidity	5% RH to 95% RH (non-condensing)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Surge protection	Service port: $\pm 2$ kV for common mode Power connector: $\pm 2$ KV for common mode and $\pm 1$ kV for differential mode

# Software Specifications

Model	RG-EG210G-P-V3
<b>System Performance Capacity</b>	
<b>Maximum number of concurrent sessions</b>	60000
<b>Recommended number of concurrent clients</b>	200
<b>Throughput</b>	1000 Mbps (Turbo Mode) 600 Mbps (Normal Mode)
<b>Basic Configurations</b>	
<b>AC mode</b>	Yes
<b>Automatically identifying the Internet access mode and obtaining IP addresses</b>	Yes
<b>Automatically learning the PPPoE username and password of other routers</b>	Yes
<b>Configuration backup</b>	Yes
<b>Internet access mode</b>	Static IP address Static IPv6 address Dynamic IP address Dynamic IPv6 address PPPoE
<b>Local upgrade</b>	Yes
<b>Log upload</b>	Yes
<b>Online upgrade</b>	Yes
<b>Restoring factory defaults</b>	Yes
<b>System language</b>	Turkish, Arabic, Vietnamese, Thai, Indonesian, Latin American Spanish, Brazilian Portuguese, Russian, French, German, European Spanish, Italian, and Polish.
<b>Authentication</b>	
<b>Portal authentication</b>	Yes
<b>One-click authentication</b>	Yes
<b>Password authentication</b>	Yes

# Software Specifications

Model	RG-EG210G-P-V3
<b>SMS-based authentication</b>	Yes
<b>Voucher authentication supported by Ruijie Cloud portal page</b>	Yes
<b>Cloud portal authentication</b>	Yes
<b>Local portal authentication</b>	Yes
<b>QR code authentication</b>	Yes
<b>Custom portal page</b>	Yes
<b>Account-based authentication supported by Ruijie Cloud portal page</b>	Yes
<b>CHAP, MS-CHAPv1, MS-CHAPv2</b>	Yes
<b>Delivery through Ruijie Cloud portal page</b>	Yes
<b>802.1X authentication</b>	Yes
<b>MAC address-based authentication</b>	Yes
<b>PPPoE server</b>	Yes
<b>Number of accounts supported by the PPPoE server</b>	100
<b>Number of concurrent clients supported by the PPPoE server</b>	65
<b>PAP</b>	Yes
<b>RADIUS authentication</b>	Yes
<b>RADIUS client</b>	Yes
<b>RADIUS accounting based on time or traffic</b>	Yes
<b>RADIUS flow control authorization</b>	Yes
<b>RADIUS proxy server</b>	Yes
<b>RADIUS traffic quota authorization</b>	Yes

# Software Specifications

Model	RG-EG210G-P-V3
<b>RADIUS user group authorization</b>	Yes
<b>Third-party authentication</b>	Yes
<b>Ethernet Interface</b>	
<b>Avoiding IP address conflicts on WAN interfaces</b>	Yes
<b>Load balancing</b>	Yes
<b>MAC address cloning</b>	Yes
<b>Multiple WAN interfaces on the same network segment</b>	Yes
<b>PPPoE clients</b>	Yes
<b>Scheduled PPPoE reconnection</b>	No
<b>Ethernet Switching</b>	
<b>Configuring multiple VLANs upon configuration delivery</b>	No
<b>Link aggregation</b>	No
<b>LLDP</b>	No
<b>VLAN</b>	Yes
<b>VLAN configuration supported on LAN ports</b>	Yes
<b>Super-VLAN</b>	No
<b>Configuring the same VLAN tag for multiple WAN ports</b>	No
<b>VLAN priority</b>	Yes
<b>Gateway Features</b>	
<b>WAN failover</b>	Yes
<b>Application priority</b>	Yes
<b>Application recognition</b>	Yes

# Software Specifications

Model	RG-EG210G-P-V3
<b>Behavior management</b>	Yes
<b>Flow control</b>	Yes
<b>Time-based blocking policy</b>	Yes
<b>IP address-based blocking policy</b>	Yes
<b>Website filtering: custom URL</b>	Yes
<b>Traffic audit</b>	Yes
<b>URL audit log</b>	Yes
<b>Audit log server</b>	Yes
<b>Audit log storage</b>	No
<b>Uploading audit logs to a server</b>	Yes
<b>IP Routing</b>	
<b>Application-based routing</b>	No
<b>Bandwidth aggregation</b>	Yes
<b>BGP</b>	Yes
<b>BGP4</b>	Yes
<b>BGP4+</b>	Yes
<b>ECMP</b>	No
<b>IPv4 static route</b>	Yes
<b>IPv6 PBR</b>	Yes
<b>IPv6 static route</b>	Yes
<b>IS-ISv4</b>	No
<b>IS-ISv6</b>	No
<b>Load balancing based on flows</b>	Yes
<b>Load balancing based on source IP addresses</b>	Yes

# Software Specifications

Model	RG-EG210G-P-V3
<b>Load balancing based on the interface weight</b>	Yes
<b>OSPFv2</b>	Yes
<b>OSPFv3</b>	Yes
<b>RIP</b>	Yes
<b>RIPng</b>	Yes
<b>IP Service</b>	
<b>3322.org</b>	Yes
<b>ALG</b>	Yes
<b>ARP binding</b>	Yes
<b>Maximum number of ARP entries</b>	1024
<b>Proxy ARP</b>	No
<b>Cloudflare</b>	Yes
<b>DHCP client</b>	Yes
<b>DHCP server</b>	Yes
<b>DHCP relay</b>	No
<b>Option 43</b>	Yes
<b>Option 138</b>	Yes
<b>Static/Dynamic NAT</b>	Yes
<b>NAT-PT</b>	No
<b>NAT loopback</b>	Yes
<b>DNS client</b>	Yes
<b>DNS proxy</b>	Yes
<b>DNS server</b>	Yes

# Software Specifications

Model	RG-EG210G-P-V3
No-IP DNS	Yes
GRE tunnel	No
IPTV	Yes
IPv4 ping	Yes
IPv6	Yes
IPv6 ping	Yes
Number of port mapping entries	256
Port mapping	Yes
DDNS	Yes
Ruijie DDNS	Yes
Alibaba Cloud DDNS	Yes
UPnP	Yes
<b>Network Management and Monitoring</b>	
Web management	Yes
Ruijie Cloud management	Yes
Management on Ruijie Reyee App	Yes
Remotely monitoring devices through Ruijie Reyee App	Yes
Restarting devices through Ruijie Reyee App	Yes
Upgrading device software version through Ruijie Reyee App	Yes
Fault diagnosis	Yes
FTP client (IPv4 address)	No
FTP server (IPv4 address)	No
TFTP client (IPv4 address)	Yes

# Software Specifications

Model	RG-EG210G-P-V3
<b>TFTP server (IPv4 address)</b>	No
<b>HTTPS login</b>	Yes
<b>NTP client</b>	Yes
<b>NTP server</b>	No
<b>Scheduled device restart</b>	Yes
<b>SNMPv1, v2c, and v3</b>	Yes
<b>SON</b>	Yes
<b>SSH</b>	No
<b>Telnet</b>	No
<b>Web login information</b>	Default IP Address: 192.168.110.1 Default Password: admin
<b>Reliability</b>	
<b>Stacking</b>	No
<b>VRRP</b>	No
<b>SD-WAN</b>	
<b>SD-WAN</b>	Yes
<b>SD-WAN performance</b>	80 Mbps
<b>Number of tunnels supported by SD-WAN</b>	24
<b>Maximum number of SD-WAN branches</b>	8
<b>Active/Standby mode (automatically switching to the standby interface when the active interface fails)</b>	Yes
<b>Bypass networking for a device in AP mode</b>	No
<b>Centralized traffic forwarding policy</b>	Yes
<b>Security</b>	

# Software Specifications

Model	RG-EG210G-P-V3
ACL	Yes
DHCP snooping	No
Malformed packet attack defense	Yes
Fragmentation attack defense	No
Teardrop attack defense	Yes
LAND attack defense	Yes
SYN flood attack defense	Yes
Smurf attack defense	Yes
IP attack defense	Yes
Disabling ping	Yes
Stateful firewall	Yes
IP-MAC binding	Yes
Network sharing prevention	Yes
Security log	Yes
Security zone	Yes
User group-based connection limiting	Yes
<b>VPN</b>	
IPsec VPN	Yes
IPsec VPN bandwidth	28 Mbps
Maximum number of branches in IPsec VPN networking	8
L2TP VPN	Yes
L2TP VPN bandwidth	130 Mbps
Maximum number of branches in L2TP VPN networking	8

# Software Specifications

Model	RG-EG210G-P-V3
OpenVPN	Yes
OpenVPN bandwidth	20 Mbps
Maximum number of branches in OpenVPN networking	16
PPTP VPN	Yes
PPTP VPN bandwidth	190 Mbps
Maximum number of branches in PPTP VPN networking	8
SSL VPN	No
Easy VPN 1.0	No
Number of VPN accounts for L2TP, PPTP, and OpenVPN	100
WireGuard server	Yes
WireGuard client	Yes
WireGuard performance	80 Mbps
Number of concurrent tunnels supported by the WireGuard server	8
<b>WLAN</b>	
Maximum number of APs (AC mode)	500
Maximum number of devices that can be managed	128
Wireless Intelligent Optimization (WIO)	Yes

## Package Contents

Model	RG-EG210G-P-V3
<b>Accessories</b>	
Power adapter	1
Power cord	1 x 1 m ± 50 mm (39.37 in. ± 1.97 in.)
<b>Manual</b>	
User Manual	1
Warranty Card	1

**Ruijie** | Reyee

 **Redefine your easy network**



**Ruijie Networks Co., Ltd.**  
Official Website: <https://Reyee.Ruijie.com>