

**TITLE:**

Cat5e 4pr UTP

**CODE:**


SFX/C5-UTP-LSZH-D-RED-305

**DESCRIPTION:**

305m Category 5e, 4pr UTP Red LSZH

**SUPPLIED AS:**

Reel of 305m

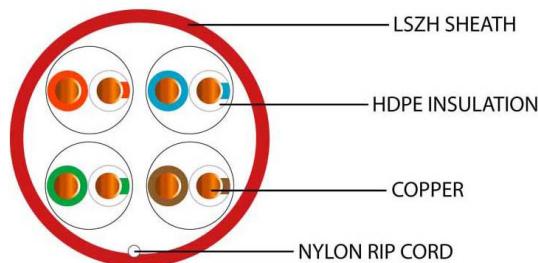

[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23



# Product Specification

## Cable Construction

CPR	Dca -s2 -a1 -d2
Conductor	Bare Copper
Conductor Diameter (mm)	0.47 ±0.01
Overall Diameter (mm)	4.80 ±0.03

## Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18

## Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Red
Overall Diameter (mm)	4.80 ±0.03
Jacket Colour	Red RAL 3000
Jacket Thickness (mm)	0.49 ±0.03
Nylon Rip-Cord	White 210D

## Electrical Characteristics

Max Conductor DC resistance @ 20°C	<1150/km
Rated Temperature (°C)	-40°C to 70°C



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23



NETWORK CABLE

**Securi-Flex®**

Network cable

## MORE INFORMATION:

Sorry, no more information is available for this product



[enquiries@securiflex.co.uk](mailto:enquiries@securiflex.co.uk) | [www.securiflex.co.uk](http://www.securiflex.co.uk) | 03333 44 66 23

TERMS AND CONDITIONS APPLY - WHILE EVERY EFFORT HAS BEEN MADE TO ENSURE THE ACCURACY AND COMPLETENESS OF THE INFORMATION, NO GUARANTEE IS GIVEN NOR RESPONSIBILITY TAKEN FOR ERRORS OR OMISSIONS IN THIS DATA SHEET.

FLAME-FLEX® Drum-Roll® LUCKINS® epim

EDA  
ELECTRICAL  
DISTRIBUTORS'  
ASSOCIATION

BSI  
Kitemarked  
DQAS

KNX  
MEMBER

CAI  
Supplier  
Control Delivery

DPR  
Supplier  
Control Delivery

UK  
CA