

## DS-C30S-02HO/4K 2-Channel 4K HDMI Output Board




The video wall controller is mainly used for screen splicing control system, and is the core control device of the system. As a new-generation FPGA-based pure hardware image processing device, it adopts the dual data switching technology and the structure of main control board and service boards. It supports processing and transmitting large data, processing multiple high-definition and ultra-high-definition signals in real time, and managing multiple screens.

- Supports YUV 444 output and 2 channels of HDMI 2.0 ports.
- Supports HDMI composite audio output.

## ▪ Specification

Chassis	
Occupied Slot	Output slot
Video Output	
Video Output Interface Type	HDMI 2.0
Video Output Interfaces	2
Max. Video Output Resolution	4K
Video Output Resolution	4096 × 2160@60 Hz, 4096 × 2160@30 Hz, 3840 × 2160@60 Hz, 3840 × 2160@30 Hz, 2560 × 1600@60 Hz, 2560 × 1440@60 Hz, 1920 × 1200@60 Hz, 1920 × 1080@60 Hz Supports LED screen, custom resolution output, 60 Hz loading output, and 8.8 MP loading with width ranging from 288 to 7680 and height ranging from 288 to 4320.
Loading Capacity for Video Output to LED	Single port load 8800000, Width 288 - 7680, Height 288 - 4320;
Audio Output	
Audio Output Interface Type	HDMI composite audio
Audio Output Interfaces	2

▪ Dimension

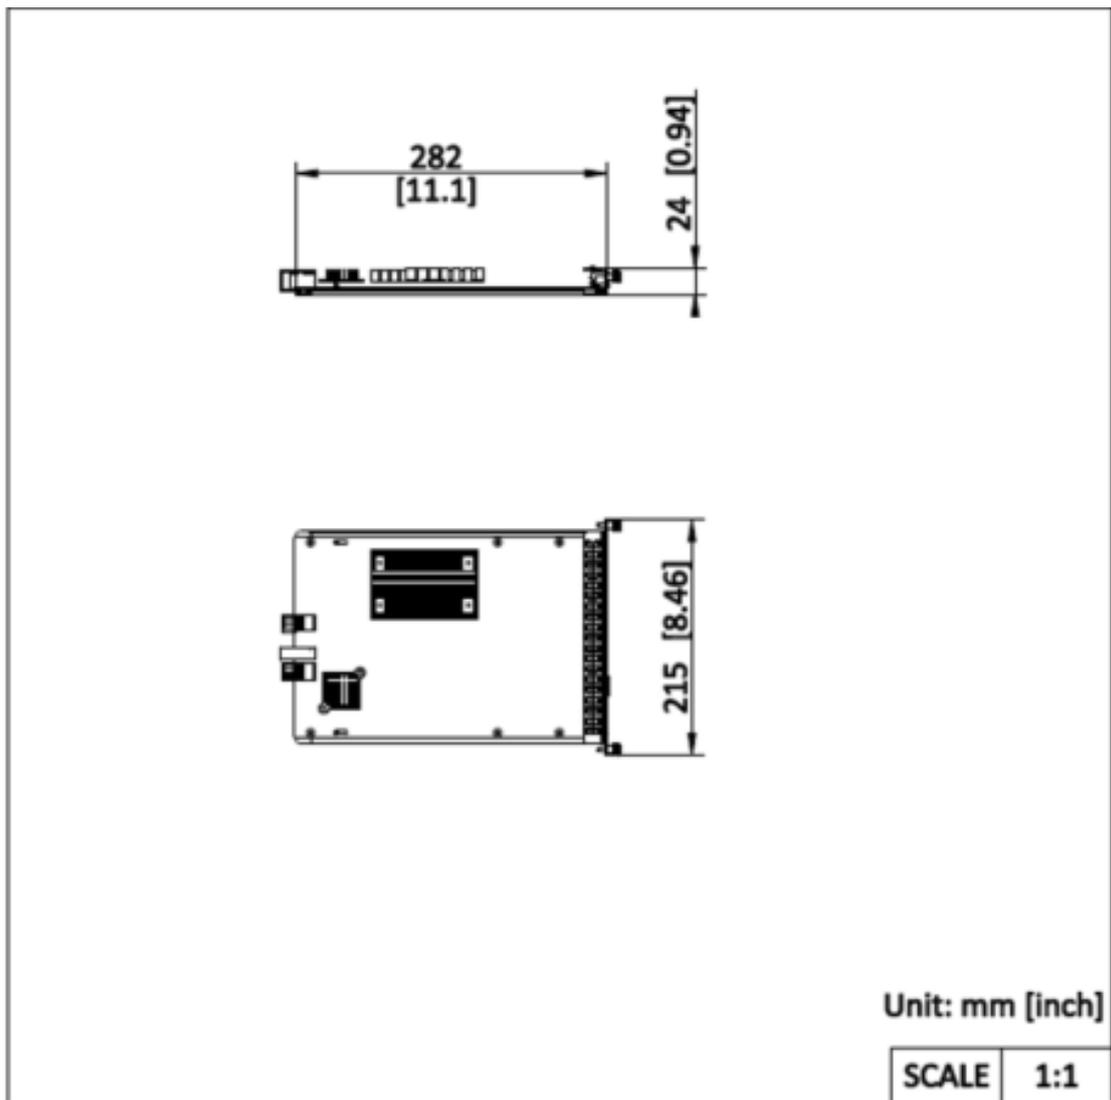

▪ Accessory

▪ Optional



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

