

QUICK START GUIDE



ievo micro™

ievo ultimate™



Cable Recommendations

Supplied cable: Up to 5m


Cat6 SFTP Ethernet braid-shielded cable with foil-shielded pairs

Up to 50m

Cat5e/Cat6a SFTP Stranded-conductor with shielded RJ45 connectors

Up to 90m

Cat5e/Cat6a SFTP Solid-conductor with shielded RJ45 connectors

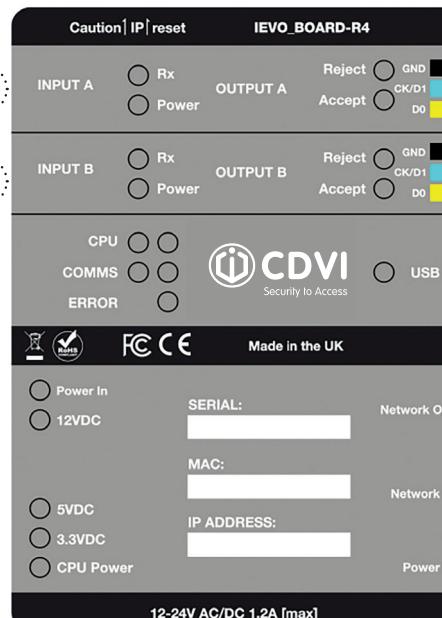

ievo Interface Board



Visit myievo.co.uk to download your software licence.



Access Control System

Wiegand Output A

Wiegand Output B

Twisted and shielded cable
min 22 AWG (0.6mm)
max 75m distance (>25m solid core)



Network Switch

Network Out

Provides a network bridge to a single ACU

Network In

Network connection to PC or LAN
Default IP address: 192.168.1.225

Non-Polarised Power Input

POE/Network input when using the POE interface board


 Power Supply
2A 12/24V