


QUICK START GUIDE

PACKAGE CONTENTS




| | | | | | | |
|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |
| Magnetic lock | Armature plate | 5x16 Roll pin | Steel washer | Rubber washer | M5X8 Screw | M5x20 Screw |
| 1 | 1 | 2 | 2 | 1 | 4 | 4 |
|  |  |  |  |  |  |  |
| M8x35 Screw | M8x25 Screw | Cap nut | Adaptor plate | Compression screw | Spacer 2mm, 3mm, 5mm | Guide piece |
| 1 | 1 | 1 | 2 | 1 | 1 each | 1 |

The V3E35R is a 300kg adaptable fixing maglock, that includes parts to mount as a compression fit or mortice installation.

Above is the complete accessory pack included with the magnet.

STEP 1

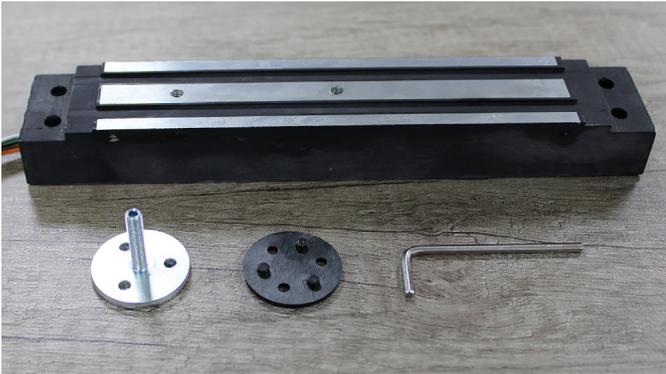

Above are the parts required to mount the maglock into the AH3 housing.

STEP 2



First, you must assemble the 2mm spacer to the compression screw as shown.

STEP 3



Next, screw the assembly into the back of the maglock using the centre hole.

STEP 4



After, screw the compression screw into the maglock completely as shown.

STEP 5



Slide the maglock with the compression screw fitted into the location slot cable. Connect the maglock to a power supply before fitting.

STEP 6



Centre the maglock in the location slot.

STEP 7



Using a 2.5mm allen key tighten the screw until the maglock is locked into position.

STEP 8



The maglock is now locked into position.

If you need further information on the product installation and set up, you can view and download the documents below.

Full Installation Manual

