

**TITLE:**

H07RN-F Rubber Flex

CODE:

SFX/H07RN-F-2C-1.0-RBR-BLK-1



DESCRIPTION:

1m (per metre) H07RN-F 2 Core 1mm
Flex Black Rubber (H07RN-F 2X1)

SUPPLIED AS:

Reel of 1m

- Designed to withstand harsh environmental conditions, making them ideal for outdoor and industrial applications. Their robust construction ensures reliable performance in extreme temperatures, oil, chemicals, and mechanical stress.
- Exceptional flexibility, enabling effortless installation even in tight spaces or complex routing scenarios. The flexibility reduces installation time and labor costs while maintaining optimal cable integrity.
- Conforms to rigorous safety standards, providing peace of mind for users. With superior electrical and mechanical properties, they ensure a stable and reliable electrical connection for extended periods.

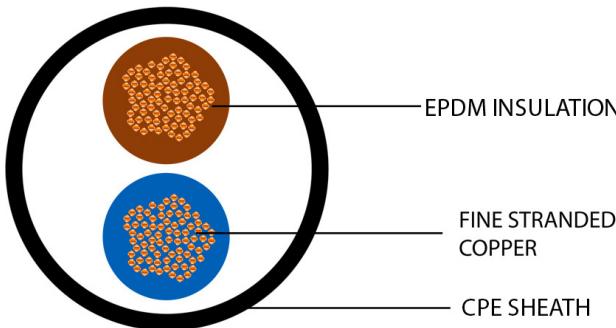



Product Specification



Cable Construction

Cable Construction	2 Core
CPR	Eca
Conductor	Fine Stranded Copper
Conductor Diameter (mm)	1.29 (32/0.197)
Overall Diameter (mm)	8.3±0.3

Insulation

Insulation	EPDM
Insulation Colour	brown,Blue

Outer/Jacket Specification

Jacket	CPE
Overall Colour	Black
Overall Diameter (mm)	8.3±0.3
Jacket Colour	Black

Electrical Characteristics

Max Conductor DC resistance @ 20°C	19.5
Rated Voltage (V)	450/750




enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



MORE INFORMATION:

EURO CLASS (ca:cable)	CLASSIFICATION CRITERIA		CPR GUIDE	Securi-Flex®
	FIRE RATING	SFX COMMENT		
Reaction to Fire BS EN ISO 1716				
A_{ca}	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.	(S) SMOKE PRODUCTION	(D) FLAMING DROPLETS
B1_{ca}	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1ca.	s1a: s1 + transmittance >=80% (BS EN 61034-2)	(A) SMOKE ACIDITY
B2_{ca}	Combustible, low flame spread & heat release contribution to the fire	Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	s1b: s1 + transmittance >=60% <80% (BS EN 61034-2)	BS EN 60399/BS EN 61034-2
C_{ca}	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving.	s1: Low production of slow propagation of smoke	BS EN 50399
D_{ca}	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s2: Intermediate production & propagation of smoke	BS EN 60754-2
Reaction to Fire BS EN 60332-1-2				
E_{ca}	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	s3: None of the above	Visit us online: www.securiflex.co.uk
F_{ca}	Combustible, fire spread of more than 425mm	Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.	d0: No fall of droplets or flaming particles, times for 1200 seconds	SFX® The Trusted Cable Brand
Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. For a cable to meet Aca, B1ca, B2ca or Cca, there also needs to be regular on-going factory audits.				

OUR OPERATING TEMPERATURE RANGE GUIDE

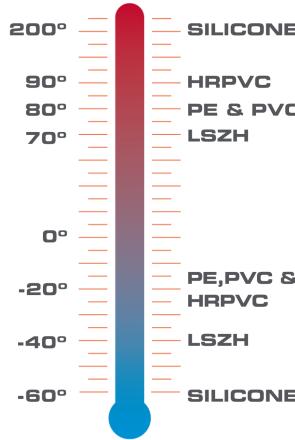

Securi-Flex®



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23