



TITLE:

OSC Overall Foil Screened Cores LSZH

CODE:

SFX/OSC10-LSZH-D-GRY-100

DESCRIPTION:

100m OSC10 10 Core 24AWG Overall
Foil Screen 600V Grey LSZH (9540)

SUPPLIED AS:

Reel of 100m





Product Specification



Cable Construction

Cable Construction	10 Cores
CPR	Dca -s:2 -a:1 -d:2
Conductor	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7(0.22mm ²)
Overall Diameter (mm)	6.20 ±0.20

Insulation

Insulation	LSZH
Insulation Colour	Red,Black,White,Green,Blue,Brown,Orange,Yellow,Violet,Grey
Insulation Resistance @20°C	>200MO/km
Insulation Thickness (mm)	0.3

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Grey
Overall Diameter (mm)	6.20 ±0.20
Jacket Colour	Grey RAL 7042
Jacket Thickness (mm)	0.70

Electrical Characteristics

Insulation Resistance @20°C	>200MO/km
Max Conductor DC resistance @ 20°C	<90.000/km
Rated Temperature (°C)	-40°C to 70°C
Rated Voltage (V)	600V




enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



MORE INFORMATION:

EURO CLASS (ca:cable)	CLASSIFICATION CRITERIA		CPR GUIDE	Securi-Flex®
	FIRE RATING	SFX COMMENT		
Reaction to Fire BS EN ISO 1716				
A_{ca}	Does not contribute to the fire	Due to availability, it will be almost impossible for a cable to meet Aca, so they should only be specified with extreme caution.	(S) SMOKE PRODUCTION	(D) FLAMING DROPLETS
Reaction to Fire BS EN 50399				
B1_{ca}	Minimum contribution to the fire	It's highly unlikely the commonly-used cables will be classified to Class B1ca.	s1a: s1 + transmittance $\geq 80\%$ (BS EN 61034-2)	d0: No fall of droplets or flaming particles, times for 1200 seconds
B2_{ca}	Combustible, low flame spread & heat release contribution to the fire	Similar to Class Cca, although a lower acceptable heat release rate and burn measurement. In practice, this is likely to be the highest class cables will meet.	s1b: s1 + transmittance $\geq 60\% < 80\%$ (BS EN 61034-2)	d1: Fall of droplets or flaming particles that persist for less than 10 seconds, timed for 1200 seconds
C_{ca}	Combustible, moderate flame spread & heat release	This is a more rigorous test than Class Dca, this is widely accepted across Europe as the 'go to' classification, but be aware, many cables do not meet Class Cca though availability is improving.	s1: Low production of slow propagation of smoke	a1: Very low acidity (conductivity $< 2.5 \mu\text{S}/\text{mm}$ & pH > 4.3)
D_{ca}	Combustible, moderate flame spread & heat release	This classification has relatively little use or acceptance within specifying/contracting organisations. This is because no large scale fire growth is measured.	s2: Intermediate production & propagation of smoke	a2: low acidity (conductivity $< 10 \mu\text{S}/\text{mm}$ & pH > 4.3)
Reaction to Fire BS EN 60332-1-2				
E_{ca}	Combustible, limited fire spread of less than 425mm	A basic test for vertical flame propagation for a single insulated wire or cable using a 1 KW pre-mixed flame. Note: This test does not measure heat release, toxic fumes or smoke.	s3: None of the above	d2: None of the above
F_{ca}	Combustible, fire spread of more than 425mm	Cables classified to Class Fca may have high levels of flammability due to the materials they are made of. This does not mean that the cable cannot be used, it is more likely to be used external.		d2: None of the above
SUBCLASSIFICATIONS FOR EUROCLASSES Bca to Dca				
		BS EN 50399/BS EN 61034-2	BS EN 50399	BS EN 60754-2
Visit us online: www.securiflex.co.uk				
SFX The Trusted Cable Brand				
Classes A to E have to be tested by an independent authorised laboratory. Most cables will fall into classes B2ca to Eca. For a cable to meet Aca, B1ca, B2ca or Cca, there also needs to be regular on-going factory audits.				

OUR OPERATING TEMPERATURE RANGE GUIDE

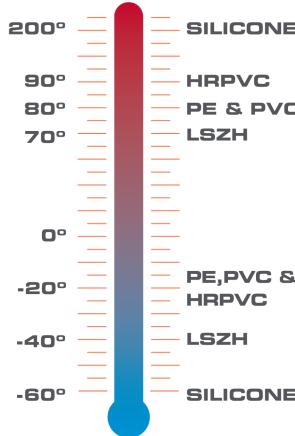

Securi-Flex®

enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23