

**TITLE:**

Cat6 4pr FTP

CODE:

SFX/C6-FTP-LSZH-BLU-305


DESCRIPTION:

305m Category 6, 4pr FTP Blue LSZH

SUPPLIED AS:

Reel of 305m

- Capable of 1000mbps transfer speed or 250mhz frequency at a maximum distance of 90 meters
- Screened for use where RF or Power equipment may produce electromagnetic interference. This is also a security measure should eavesdropping be apparent.
- Low smoke zero halogen plastic is good for use inside public buildings and spaces as will not emit toxic gases if the cable catches fire
- Comes in a variety of colours
- Improved performance and protection against fire
- Supplied in an easy pull box

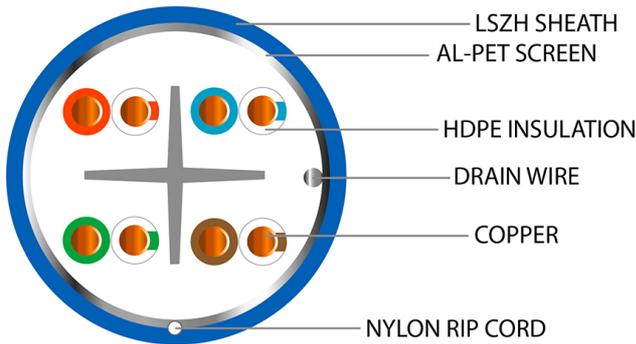

SFXC6FTPLSZHBLU305 Image



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23



Product Specification



Cable Construction

CPR	Eca
Conductor	Bare Copper
Conductor Diameter (mm)	0.55 ±0.010
Overall Diameter (mm)	7.40 ±0.30

Insulation

Insulation	HDPE
Insulation Colour	Blue/White/Blue;Orange/White/Orange;Green/White/Green;Brown/White/Brown
Insulation Thickness (mm)	0.18

Outer/Jacket Specification

Jacket	LSZH
Overall Colour	Blue
Overall Diameter (mm)	7.40 ±0.30
Jacket Colour	Blue RAL 5012
Jacket Thickness (mm)	0.60 ±0.05
Nylon Rip-Cord	White 210D

Electrical Characteristics

Max Conductor DC resistance @ 20°C	<93.80/km
Rated Temperature (°C)	-40°C to 70°C





Network cable

MORE INFORMATION:

 SFXC6FTPLSZHBLU305

 SFXC6FTPLSZHBLU305



enquiries@securiflex.co.uk | www.securiflex.co.uk | 03333 44 66 23